


# ARMORED LOOSE CABLE

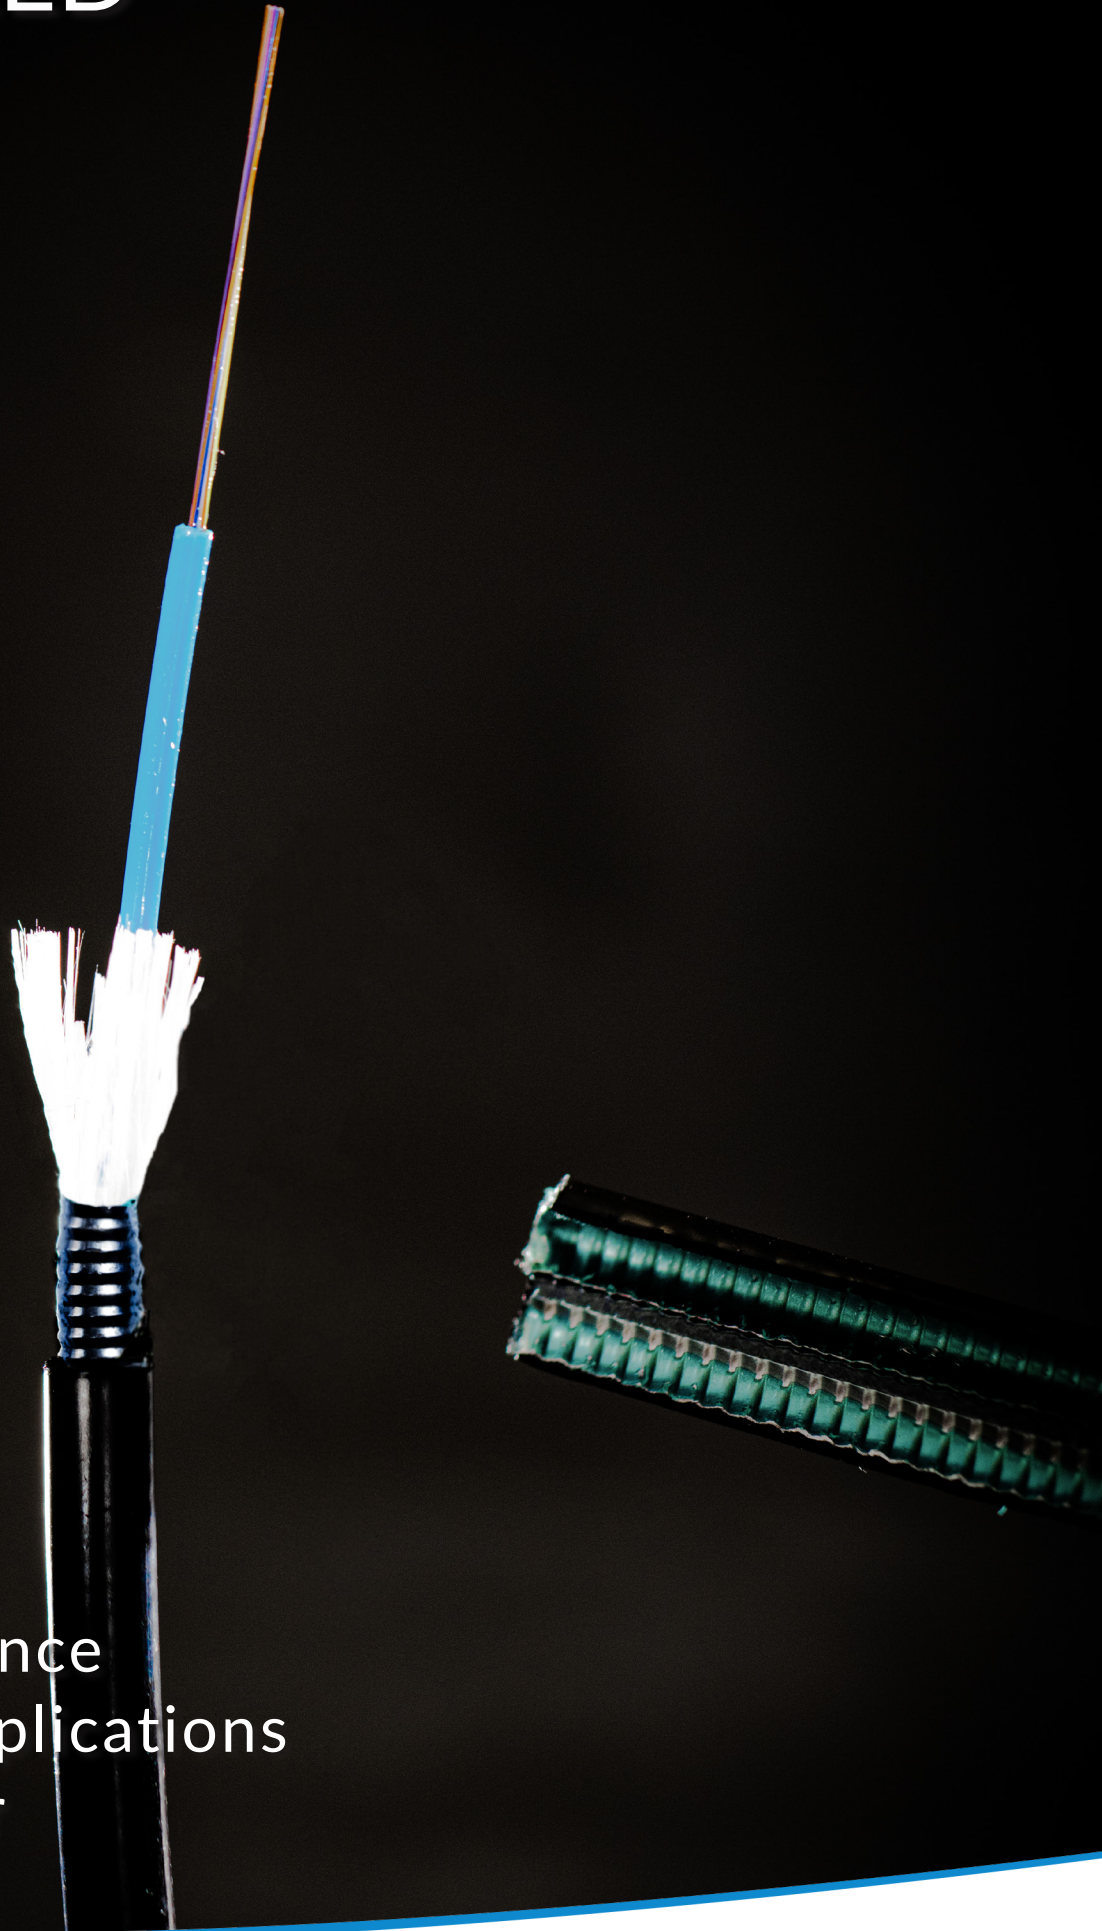

High resistance  
Outdoor Applications  
Metal armor

# ARMORED LOOSE CABLE


The loose armored cables have, for the entire length of the cable, a corrugated or banded metal protection. This specific processing guarantees absolute resistance against rodents in an outdoor environment.



## TECHNICAL SPECIFICATIONS

TYPE OF FIBER	SM: G.652 MM: OM1, OM2, OM3, OM4					
ASSEMBLABLE CONNECTORS	SC - LC - FC - ST - MU - E2000					
NUMBER OF FIBERS	4	6	8	12	16	24
EXTERNAL CABLE DIAMETER	8.3 mm			9 mm		
WEIGHT	74 kg/km			92 kg/km		
EXTERNAL SHEATH OF THE	PE					
CABLE SINGLE FIBER COATING	Acrylate					
MINIMUM BENDING RADIUS	150 mm					
TENSILE STRENGTH	1200N					
CRUSHING STRENGTH	500 N/cm					
STANDARD PACKAGING	2100 m reels					
OPERATING TEMPERATURE	-20 ÷ + 70 °C					

### PRODUCT DETAILS

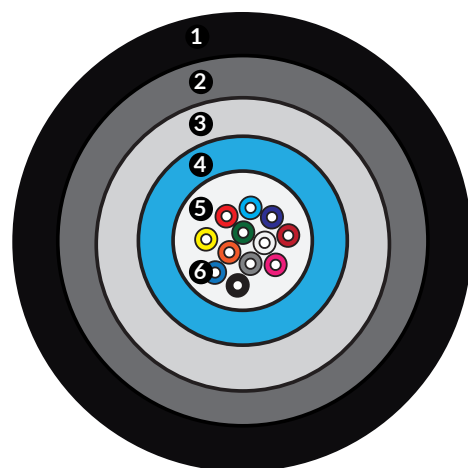

- 1 - Outer sheath
- 2 - Metal armor
- 3 - Reinforcement element
- 4 - Central tube
- 5 - Anti-humidity gel
- 6 - Optical fiber with tight coating

Applicable standards EN 60793 / EN 60794-1/ EN 50173-1 / ISO 11801