

BEP 32 F.O.




Three circular entrances
and an oval entrance IP56
In compliance with TIM 983

BEP

32 F.O.

32 F.O. building optical splitter, suitable both indoor and outdoor applications, it is used in FTTH applications. It is equipped with 6 junction cards with 12 optical fibers and 5 cable entries with a 25 mm sheath.

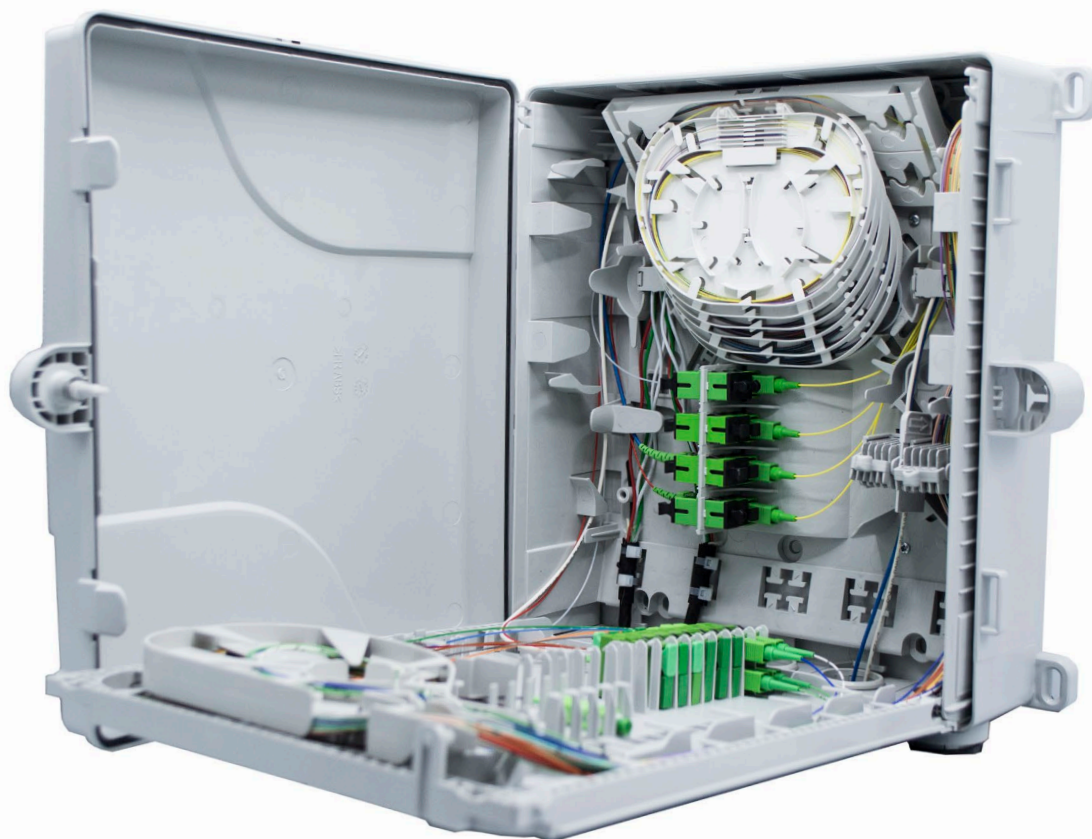

TECHNICAL SPECIFICATIONS

HEIGHT	285 mm
WIDTH	260 mm
DEPTH	95 mm
TERMINATION (HORIZONTAL RACK)	Up to 12 SC / APC Simplex
TERMINATION (VERTICAL UI RACK)	Up to 16 SC / APC Duplex
NUMBER OF CABLE INPUTS	5
DEGREES OF PROTECTION	IP56 - IK10
MATERIAL	ABS
COLOR	Grey RAL 7035
LOCK	Securvite, Triangular or Classic
PARKING SPLITTER OUTPUTS	16

PRODUCT DETAILS

