


DOME CLOSURE

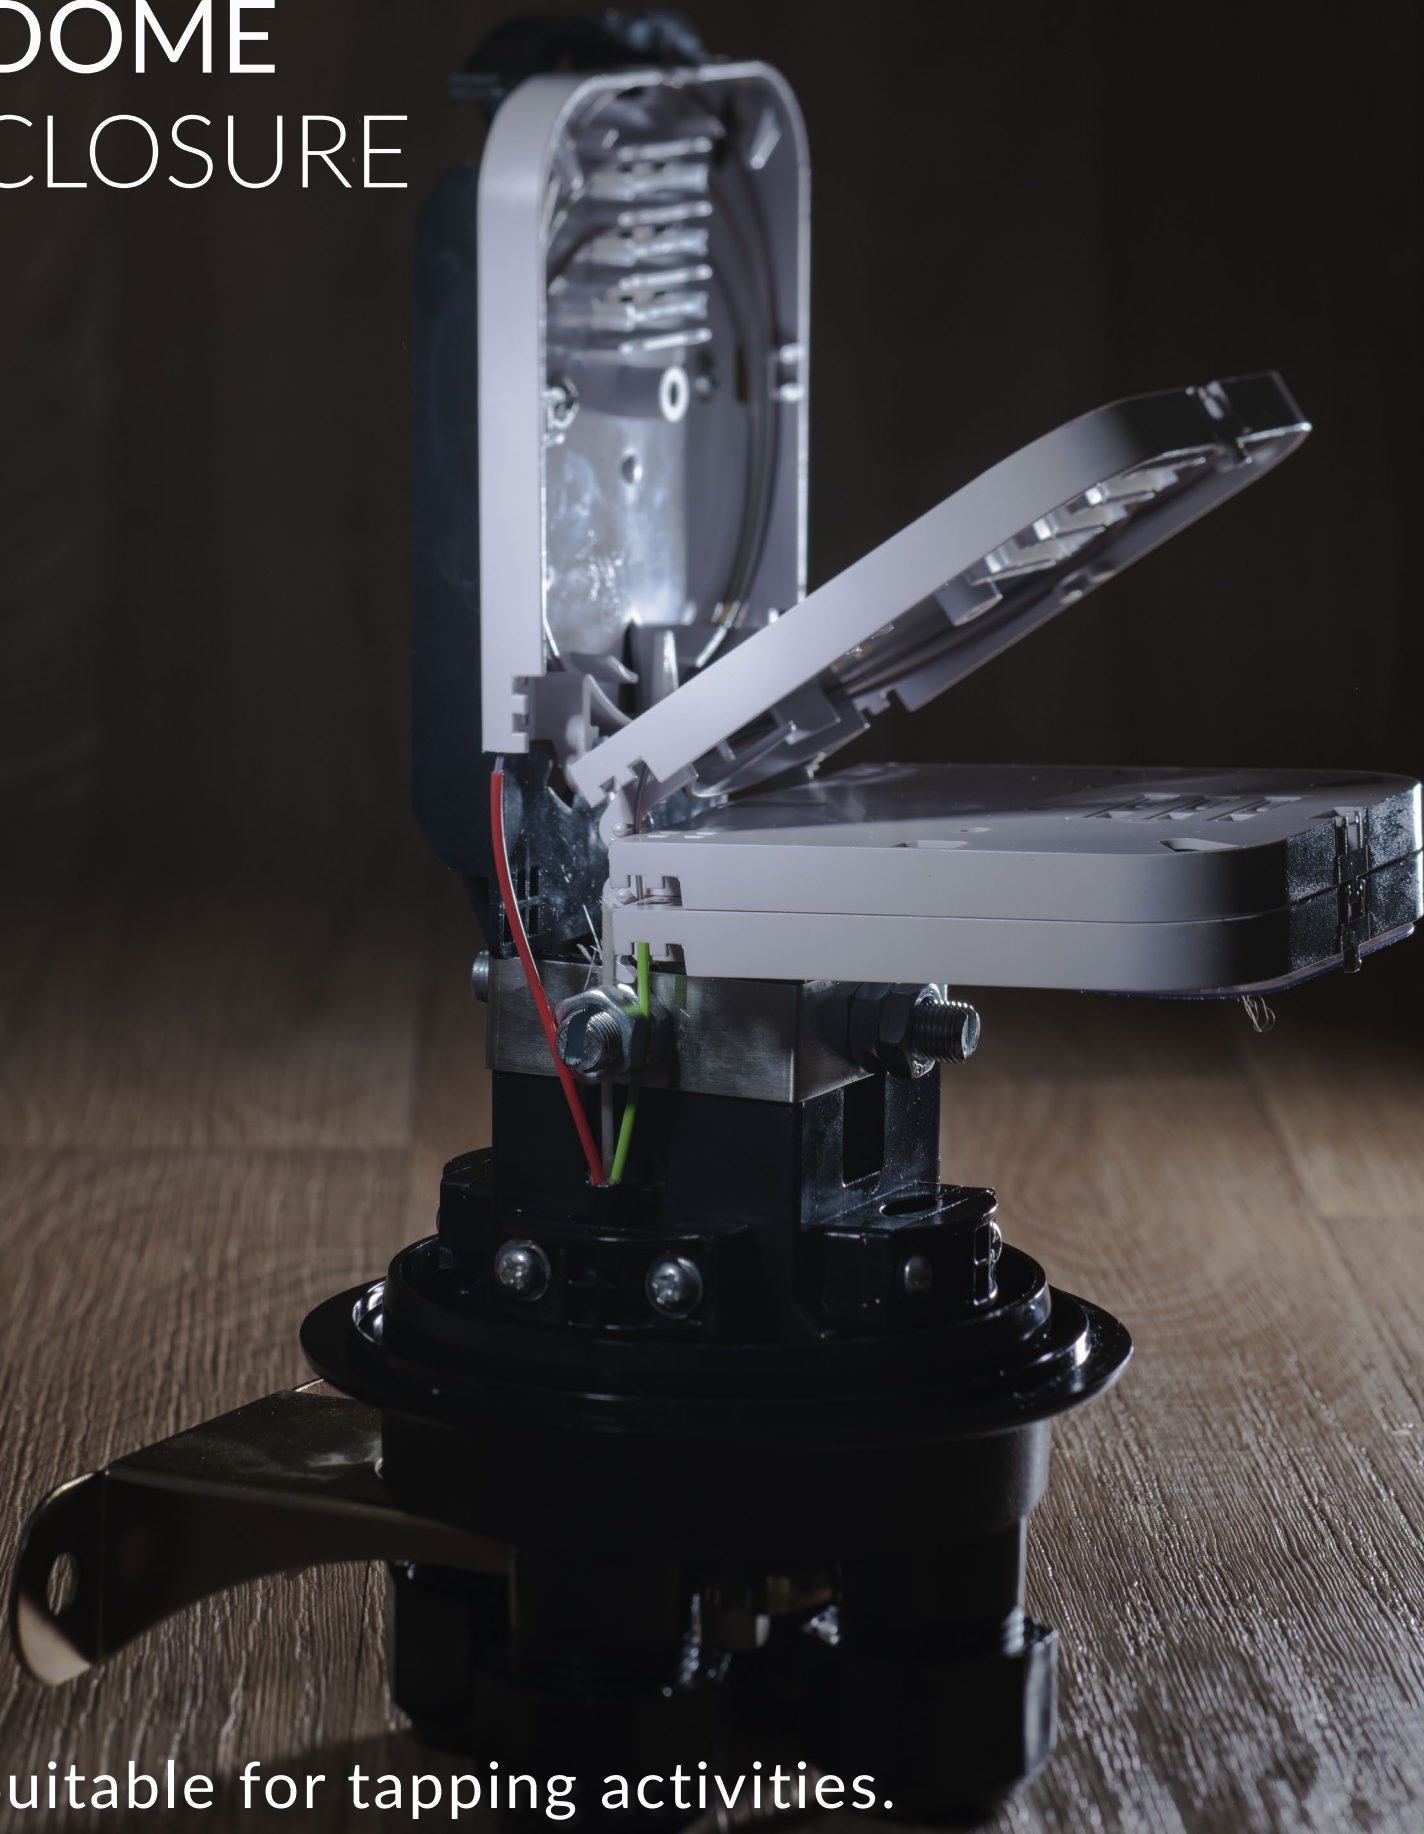

Suitable for tapping activities.
IP68. Management up to 144 f.o.

DOME CLOUSER

Dome closures are passive safe optical containers useful to protect joints in tapping applications (branch network) or for repairs of optical connections in hostile environments.



TECHNICAL SPECIFICATIONS

NUMBER OF OPTICAL FIBERS	Up to 144 f.o.	Up to 48 f.o.
HEIGHT	450 mm	305 mm
WIDTH	223 mm	147 mm
N. OF JUNCTION PER BOARD	24	From 6 to 12
N. OF JUNCTION BOARDS	6	4
N. OF CIRCULAR CABLE INPUTS	4	3
NUMBER OF OVAL CABLE INPUTS	1	1
MANAGEABLE CABLE DIAMETER	8 ÷ 17,5 mm	6 ÷ 16 mm
DEGREE OF PROTECTION	IP68	IP68
MATERIAL	ABS	Polypropylene
COLOR	Black	Black

PRODUCT DETAILS

