


FAN OUT MTP/MPO

High Density
Dielectric
It supports 40/100 Gbps protocols

FAN OUT MTP/MPO

With 12 or 24 fiber optics, completely dielectric, this cable is terminated with an MPO connector on one side and, on the other, thanks to a compact fan out, with LC or SC connectors.

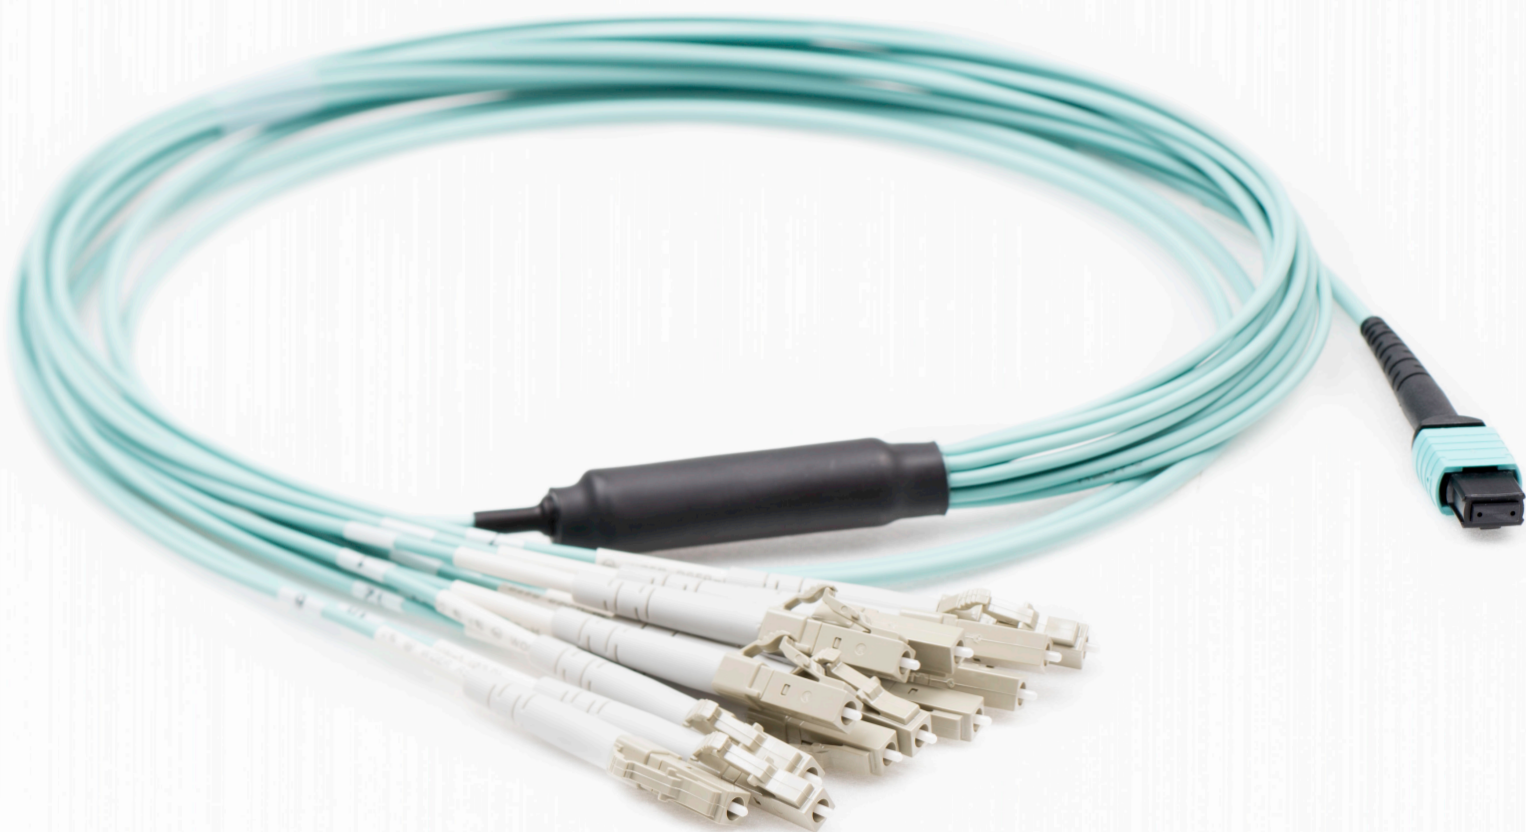

TECHNICAL SPECIFICATIONS

TYPE FIBER	OS2 - OM3 - OM4	
CABLE OUTER DIAMETER	3 mm	
FAN OUT EXTERNAL DIAMETER	2 mm	
OUTER SHEATH	LSZH	
NUMBER OF FIBERS	12	24
DYNAMIC BENDING RADIUS	20 x Ø cable	
OPERATIVE TEMPERATURE	-10 ÷ +60 °C	
REINFORCEMENT ELEMENT	Aramid yarns	

PRODUCT DETAILS

