

FTTH PATCHCORD



SC/APC Connector
LSZH
Bend insensitive

FTTH PATCHCORD


This patchcord is connectorized by one end only. The other is free and suitable for fusion splicing operations. This type of product it is suitable for FTTH applications, in the fiber branching to the apartments.



TECHNICAL SPECIFICATIONS

TYPE FIBER	SM-9/125 ITU-T G657 A	
BUFFER DIAMETER (MM)	0.9 ±0.05	
TOTAL CABLE DIAMETER	2,6±0,1	
REINFORCEMENT ELEMENT	Aramid yarns	
COLOR	RAL 9002	
MINIMUM BENDING RADIUS	Perm.: 40 mm	Temp.: 20 mm
TRACTION RESISTANCE	150 N Δ I.L. ≤0,1db/km	
IMPACT	Long period: 100 N	Short period: 500N
TEMPERATURE (° C)	-40 ÷ +60	

PRODUCT DETAILS

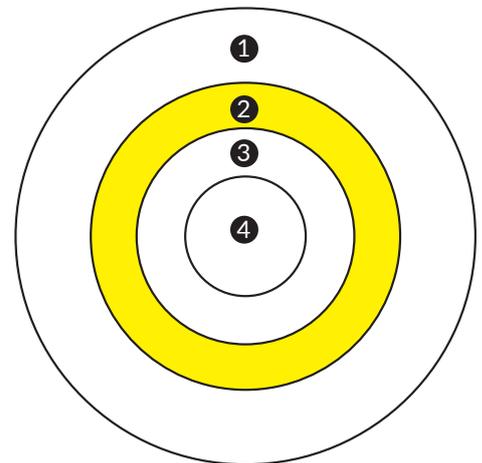

- 1 - Outer Sheath - LSZH
- 2 - Aramid Yarns
- 3 - Acrilate
- 4 - Optical fiber

Applicable standard ITU-T G657A2 - IEC 61753-1 - CEI 61754-4/A2 - CEI EN 61300-2/3 - IEC 60794