



MULTIPLE ADAPTER

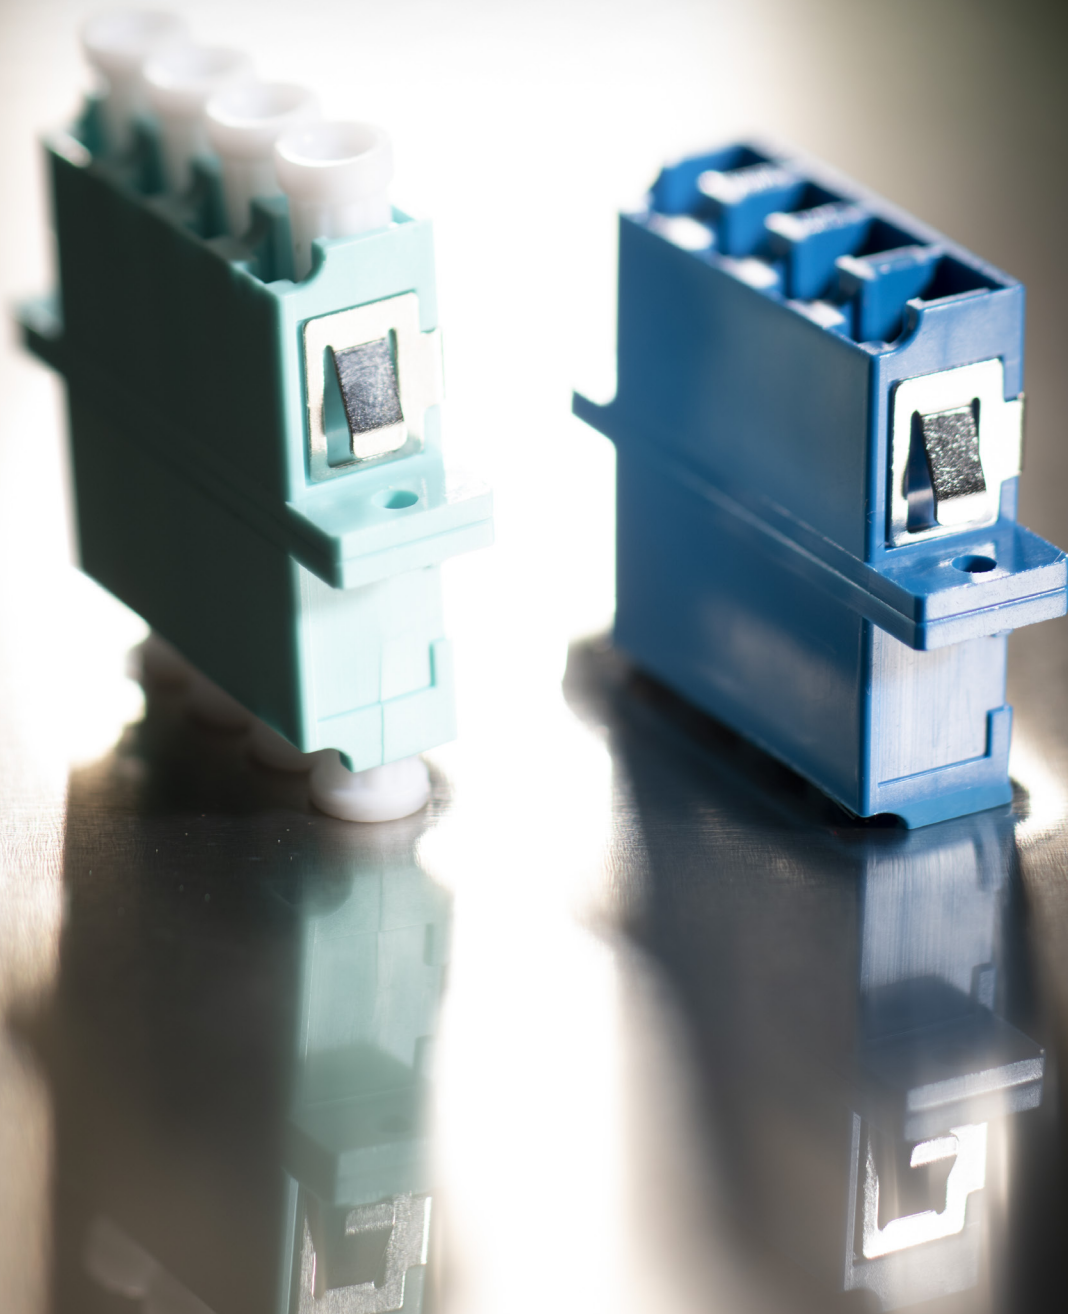

Available with or without flange
Allows any type of connection
Sleeve in zirconia (SM) or bronze (MM)

MULTIPLE ADAPTER

The multiple adapters allow a quick connection between eight or more optical connectors, ensuring maximum alignment between the fibers with a contextual saving in terms of space.

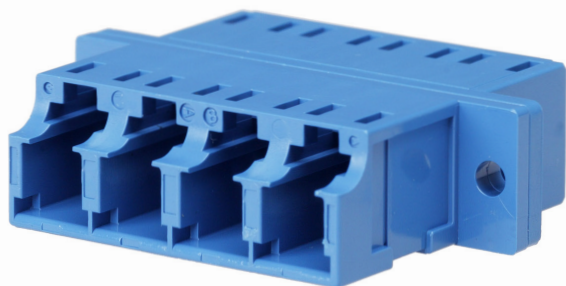

TECHNICAL SPECIFICATIONS

TYPE OF ADAPTER	SC2	LC2	MTP/MPO
DURATION (INSERTION CYCLES)	1000		
OPERATING TEMPERATURE	da -40C° a +85C°		
MATERIALS UL94	√		
BODY COLOR ADAPTER			
SM PC	Blu	Black	
SM APC	Green	Black	
MM	Beige / Aqua	Black	
TYPE OF FIBER			
SM-R 9/125	√		
MM-R 50/125 OM2-OM3-OM4	√		
MM-R 2.5/125 OM1	√		
SPECIFICIATIONS			
SLEEVE MATERIAL	Zirconia (SM) - Bronze (MM)		n/a
TYPICAL INSERTION LOSS (dB)			
SM PC (@1310 - 1550nm)	0,10	0.10 ÷ 0.35	
SM APC (@1310 - 1550nm)	0,10	0.10 ÷ 0.35	
MM (@850 - 1300nm)	0,20	0.15 ÷ 0.35	

PRODUCT DETAILS

