


POP BREAKOUT CABLE

Dielectric
Compact
CPR Dca compliant

POP BREAKOUT CABLE


Breakout cables, with a capacity of up to 16 optical fibers, consisting of 2mm diameter optical patchcords wrapped in a helix - SZ - on a central pull element.

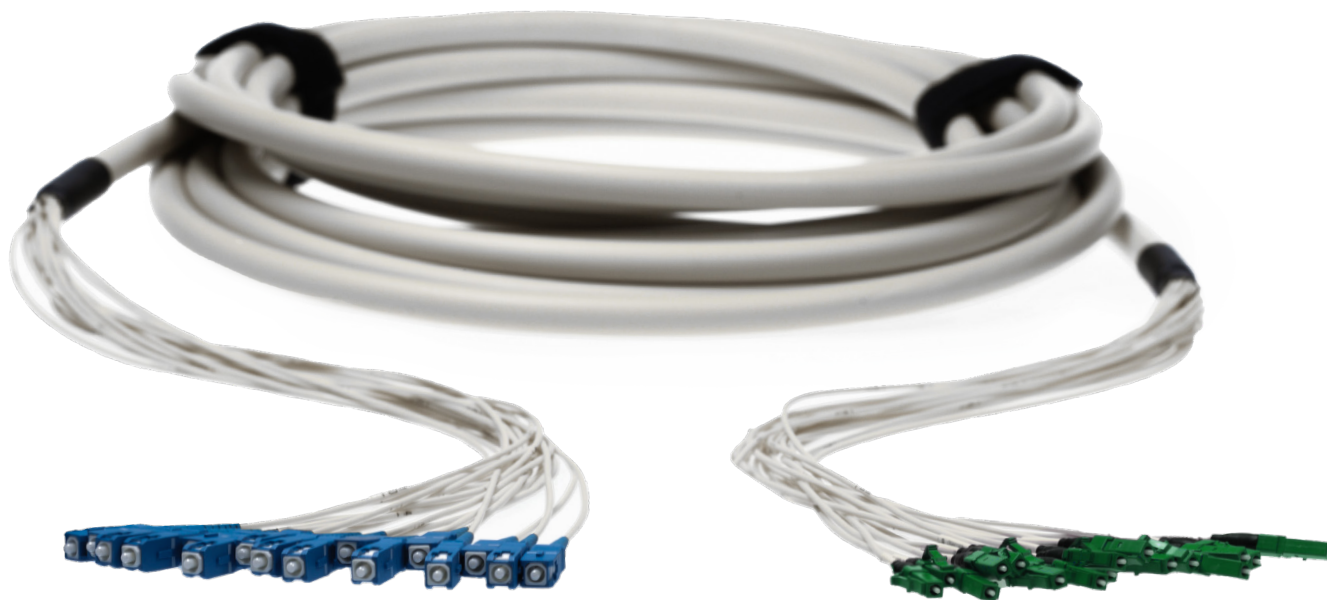

TECHNICAL SPECIFICATIONS

NUMBER OF FIBERS	2	4	6	8	12	16
TYPE OF FIBER	SM G652, G657A1 - MM OM1, OM2, OM3, OM4					
REINFORCEMENT ELEMENT	Aramid yarns					
CABLE EXTERNAL SHEATH	LSZH - color white					
PATCHCORD SHEATH	LSZH - color white					
PATCHCORD DIAMETER	2 mm					
IDENTIFICATION	by numbers					
WEIGHT	45	45	63	89	153	136
EXTERNAL DIAMETER	7.1	7.1	8.3	9.8	12.7	12.7
TENSILE STRENGTH	400	600	900	1200	1700	2200
CRUSHING RESISTANCE	1500N					
OPERATING TEMPERATURE	-20 ÷ +70 °C					
MINIMUM BENDING RADIUS	20 x Ø cable					

PRODUCT DETAILS

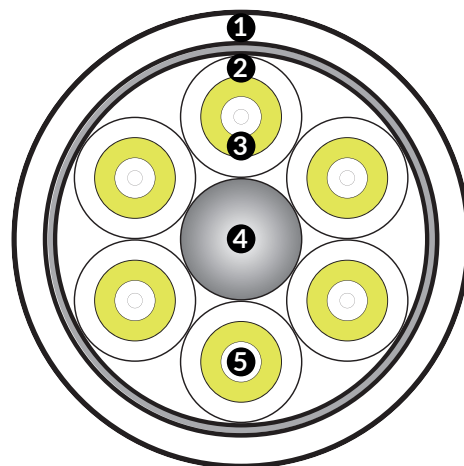

- 1 - Outer sheath - LSZH
- 2 - Patchcord outer jacket- LSZH
- 3 - Aramid yarns
- 4 - Centrall pull element
- 5 - Optical fiber with tight coating

Applicable standard IEC 60794-1-21 IEC 60794-1-22 Dca s2d2a1