


# PRE TERMINATED CABLE WITH COMPACT FAN OUT

Aluminum made  
LSZH  
Custom made



# PRE TERMINATED CABLE WITH COMPACT FAN OUT


Preassembled cables with fan out, with cable branches scaled according to the number of fibers inserted. Supplied with pull element of polyamide protection pipes, which guarantee and facilitate installation and effectively protect the certified connectors.

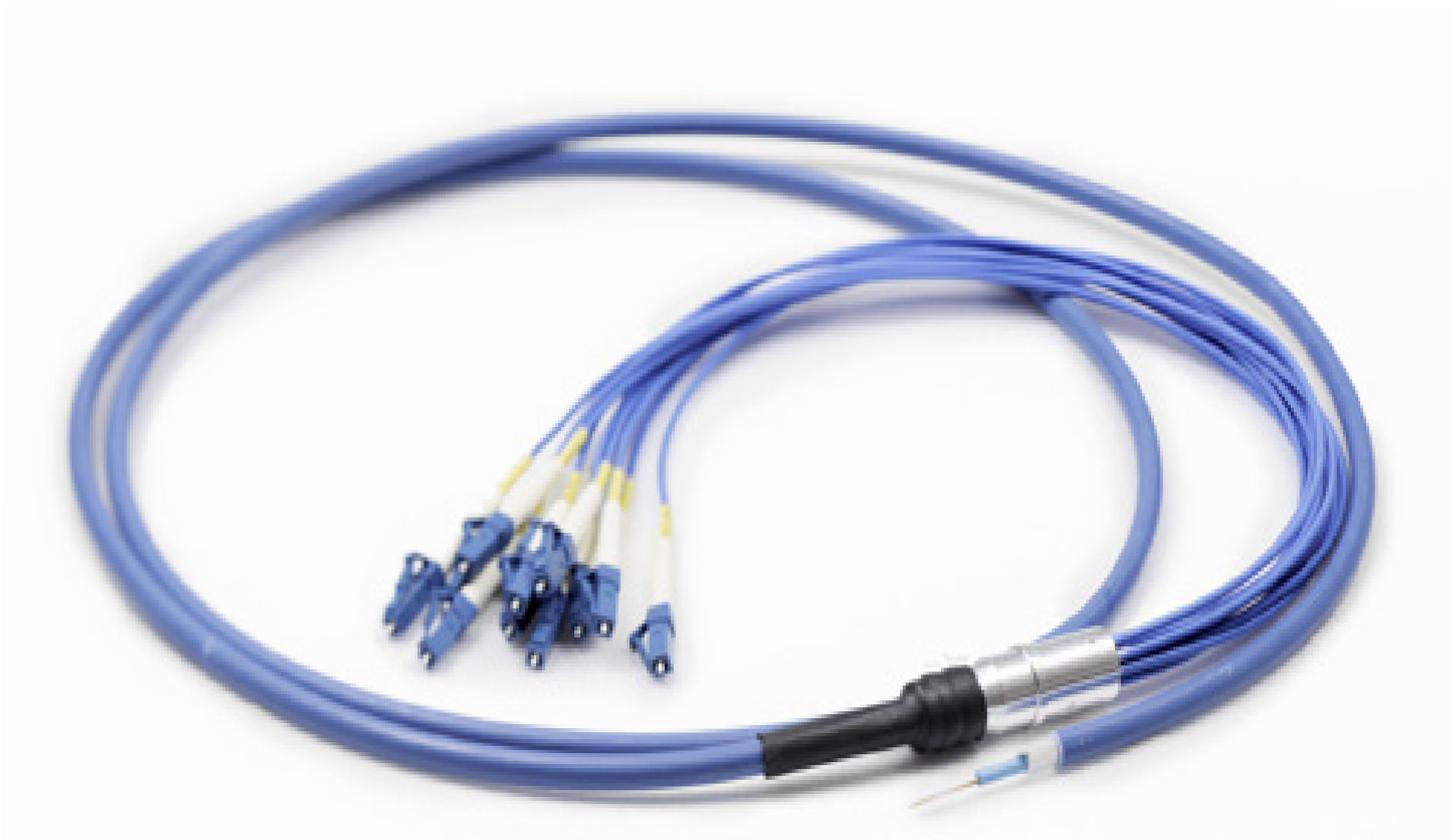

## TECHNICAL SPECIFICATIONS

TYPE OF FIBER	SM: G.652, G.657, G.655 MM: OM1, OM2, OM3, OM4			
ASSEMBLABLE CONNECTORS	SC - LC - FC - ST - MU - E2000			
NUMBER OF FIBERS	4-12 fo	16-24 fo	36 fo	48 fo
CABLE EXTERNAL DIAMETER	6,2	7,3	8,0	8,8
OUTER SHEATH	LSZH			
CABLE SINGLE FIBER COATING	Acrylate			
MINIMUM BENDING RADIUS	60 mm			
STANDARD PACKING	2.000 / 4.000m reels			
OPERATING TEMPERATURE (° C)	-25 / +70			
WEIGHT (Kg / Km)	40,6	53	62	83

### PRODUCT DETAILS

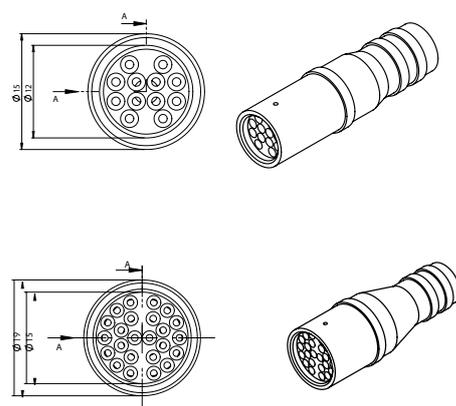

Applicable standard CEI/EN 60793 CEI/EN 60794-1