



PATCHCORD DUPLEX

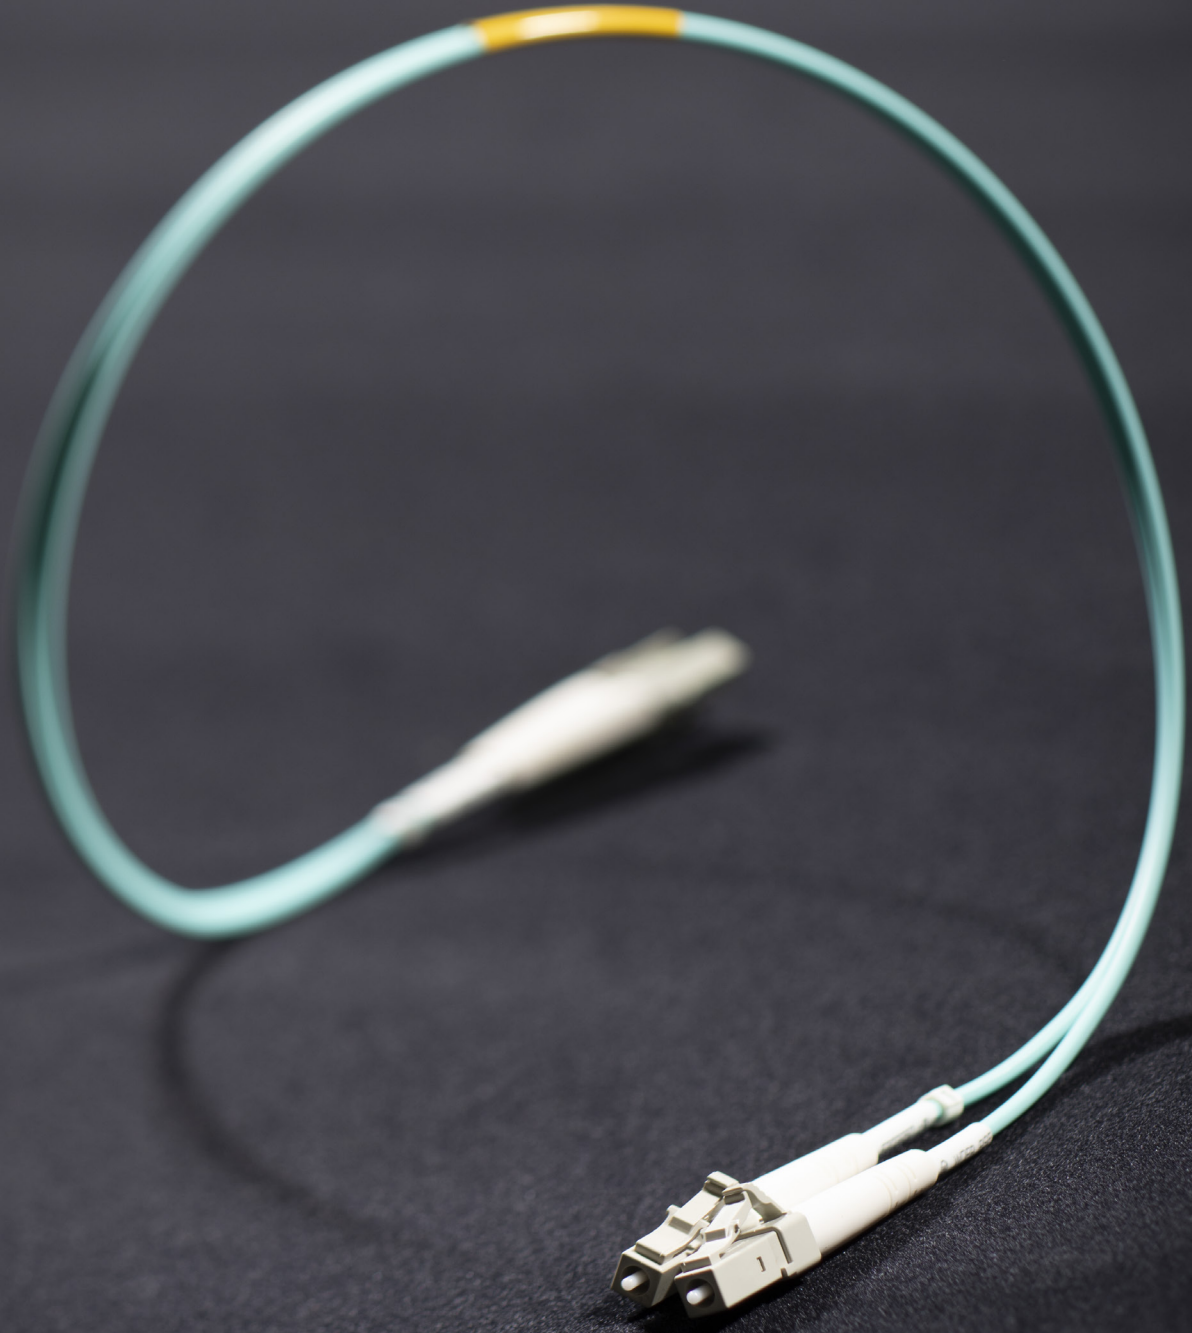

Indoor applications
Reinforcement in aramid yarns
LSZH sheath

PATCHCORD DUPLEX


Two-fiber connecting patchcord available with singlemode or multimode fiber, in every footage and with any type of connector. The LSZH sheath makes them suitable for indoor applications.

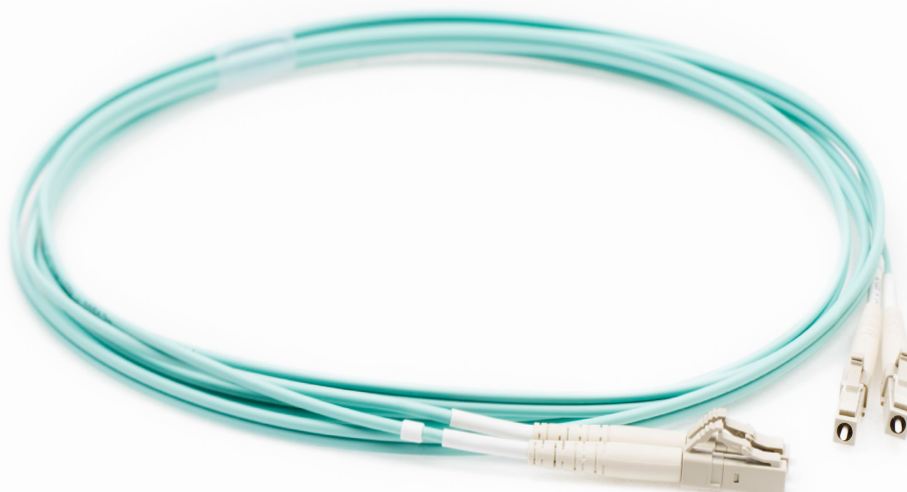

TECHNICAL SPECIFICATIONS

TYPE FIBER	SM: G.652D, G.657A, G.655 - MM: OM1, OM2, OM3, OM4	
AVAILABLE CABLES DIAMETER	1,6 x 3,2	2,0 x 4,0
BUFFER DIAMETER	0,9 mm	
MINIMUM BENDING RADIUS	20 x Ø cavo	
TRACTION RESISTANCE	400 N	600 N
CRUSHING RESISTANCE	200 N/100mm	
OUTER SHEATH	LSZH	
SECONDARY COATING	Acrylate - Tight o Semitight	
REINFORCEMENTS	Aramid yarns	
WEIGHT	5,0 kg/km	10,0 kg/km
ASSEMBLABLE CONNECTORS	SC - LC - FC - ST - MU - E2000 - SMA	
TEMPERATURE	-20 ÷ +70 °C	

PRODUCT DETAILS

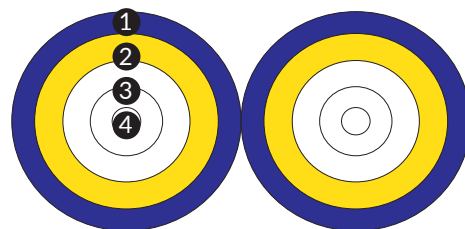

- 1 - Outer sheath of the cable - LSZH
- 2 - Aramid yarns
- 3 - Acrylate
- 4 - Optical fiber

Applicable standard CEI/EN 60793-1 CEI/EN 60794-1 CEI/EN 60332-1/3 IEC 60754-1/2 IEC 61034-1/2