



PATCHCORD SIMPLEX

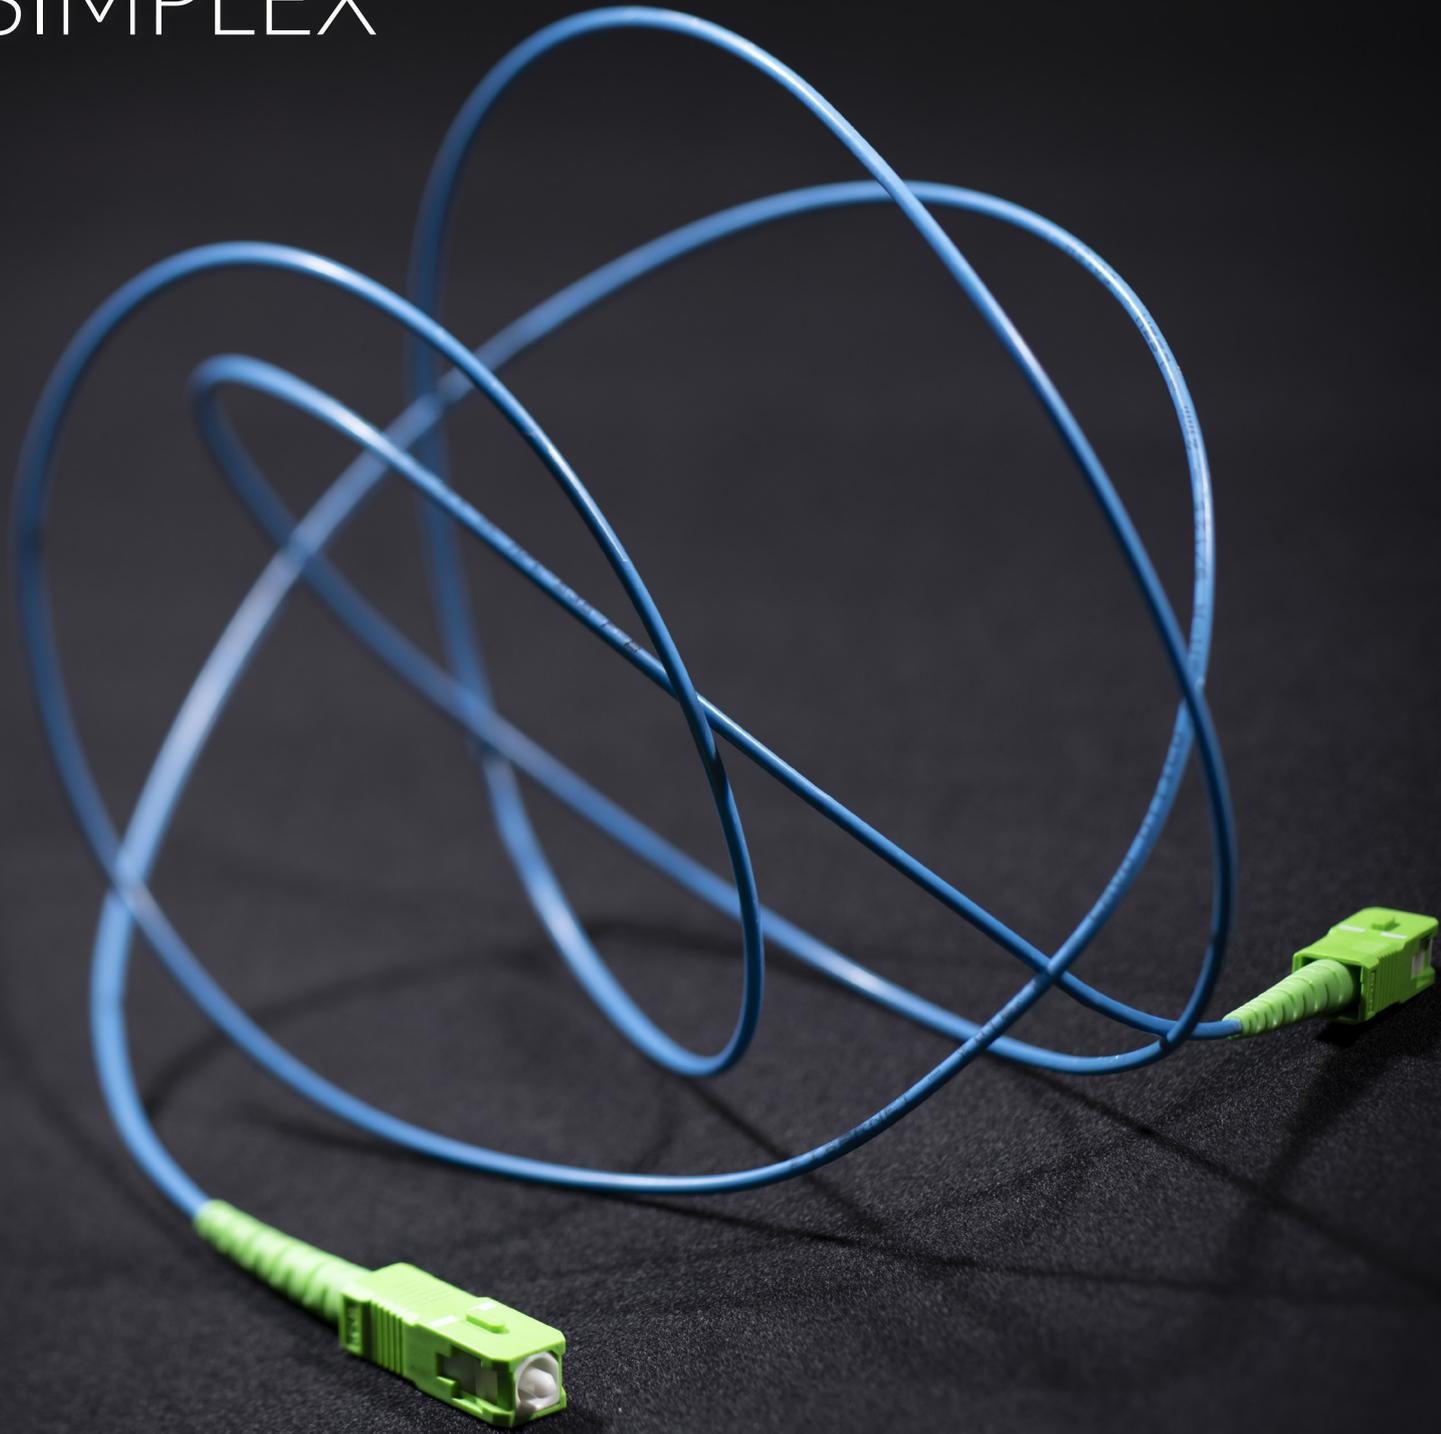

Indoor applications
Reinforcement in aramid yarns
LSZH sheath

PATCHCORD SIMPLEX


Single fiber connection patchcord available with single-mode or multi-mode fiber, in every footage and with any type of connector. The LSZH sheath makes them suitable for indoor applications.

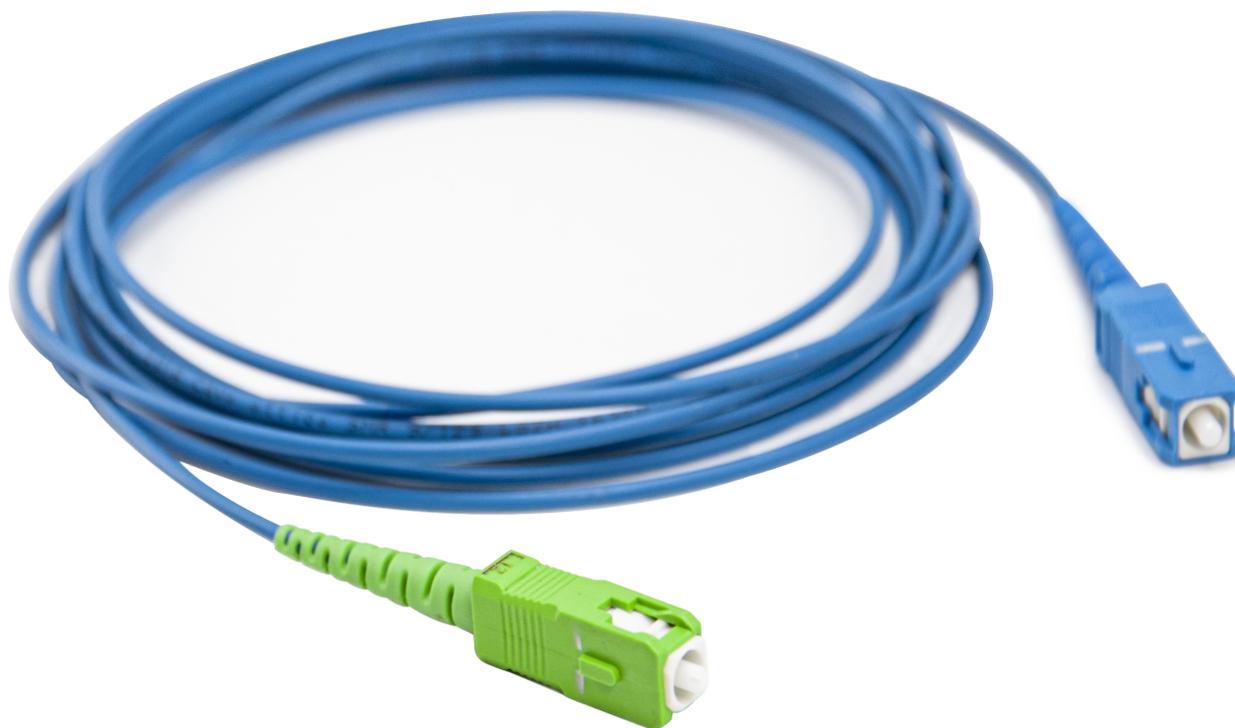

TECHNICAL SPECIFICATIONS

TYPE FIBER	SM: G.652D, G.657A, G.655 - MM: OM1, OM2, OM3, OM4		
AVAILABLE CABLES DIAMETER	1.6	2.0	3.0
BUFFER DIAMETER	0,9 mm		
MINIMUM BENDING RADIUS	20 x Ø cavo		
TRACTION RESISTANCE	200 N		
CRUSHING RESISTANCE	150 N/100mm		
OUTER SHEATH	LSZH		
SECONDARY COATING	Acrylate - Tight o Semitight		
REINFORCEMENTS	Aramid yarns		
WEIGHT	2.0 kg/km	4.0 kg/km	
ASSEMBLABLE CONNECTORS	SC - LC - FC - ST - MU - E2000 - SMA		
TEMPERATURE	- 20 ÷ +70 °C		

PRODUCT DETAILS

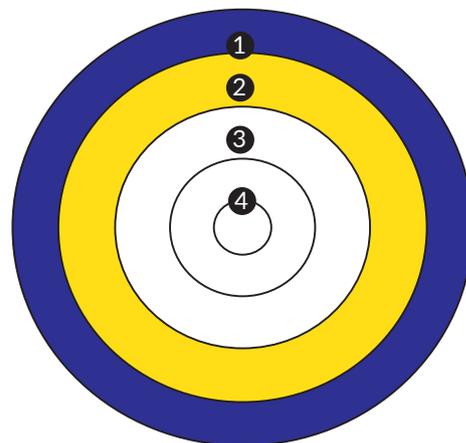

- 1 - Outer sheath of the cable - LSZH
- 2 - Aramid yarns
- 3 - Acrylate
- 4 - Optical fiber

Applicable standard CEI/EN 60793-1 CEI/EN 60794-1 CEI/EN 60332-3 CEI/EN 60332-1