

# RISER CABLE

Compact  
Multifibre  
CPR Compliant



# RISER CABLE


Made with central tube containing 8 250 µm fibers (identified by different colors). The cable is supplied already assembled and spliced with the STOA or the Head Terminal. It complies with CPR regulations.



## TECHNICAL SPECIFICATIONS

TYPE OF FIBER	G.675-A2
NUMBER OF FIBERS	8
CABLE DIAMETER	2.8mm
CABLE SHEATH	LSZH - CPR Compliant
COLOR	White RAL 5015
FIBER COATING	Acrylate 250 µm - Identification by color code
TENSILE STRENGTH	500N
CRUSHING RESISTANCE	1500/10 N/cm
MINIMUM BENDING RADIUS	20 x Ø
WEIGHT	6 kg/km
TEMPERATURE	-10 ÷ +60 °C
STANDARD PACKAGING	Coils 2.000 m

### PRODUCT DETAILS

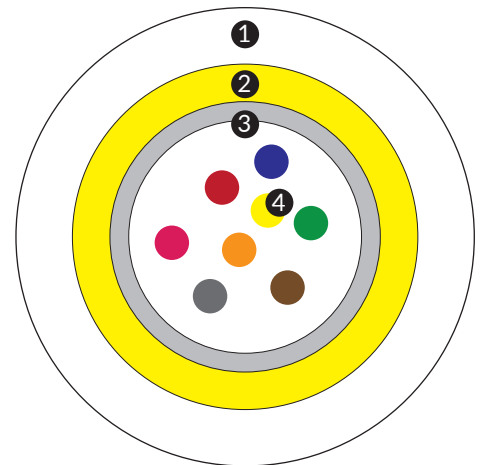

- 1 - Cable outer sheath - LSZH
- 2 - Aramid yarns
- 3 - Jelly filled
- 4 - Optical fiber with Tight coating

Applicable standards IEC-60332 - IEC - 60574 - IEC 61034 - ITU-T G.657