


SINGLEMODE KIT PIGTAIL

Color coded
Easy to install
LSZH

SINGLEMODE KIT PIGTAIL

Pigtails are used for terminating optical cables using the fusion splicing technique. The different color of the coating helps the operator to identify the fibers.

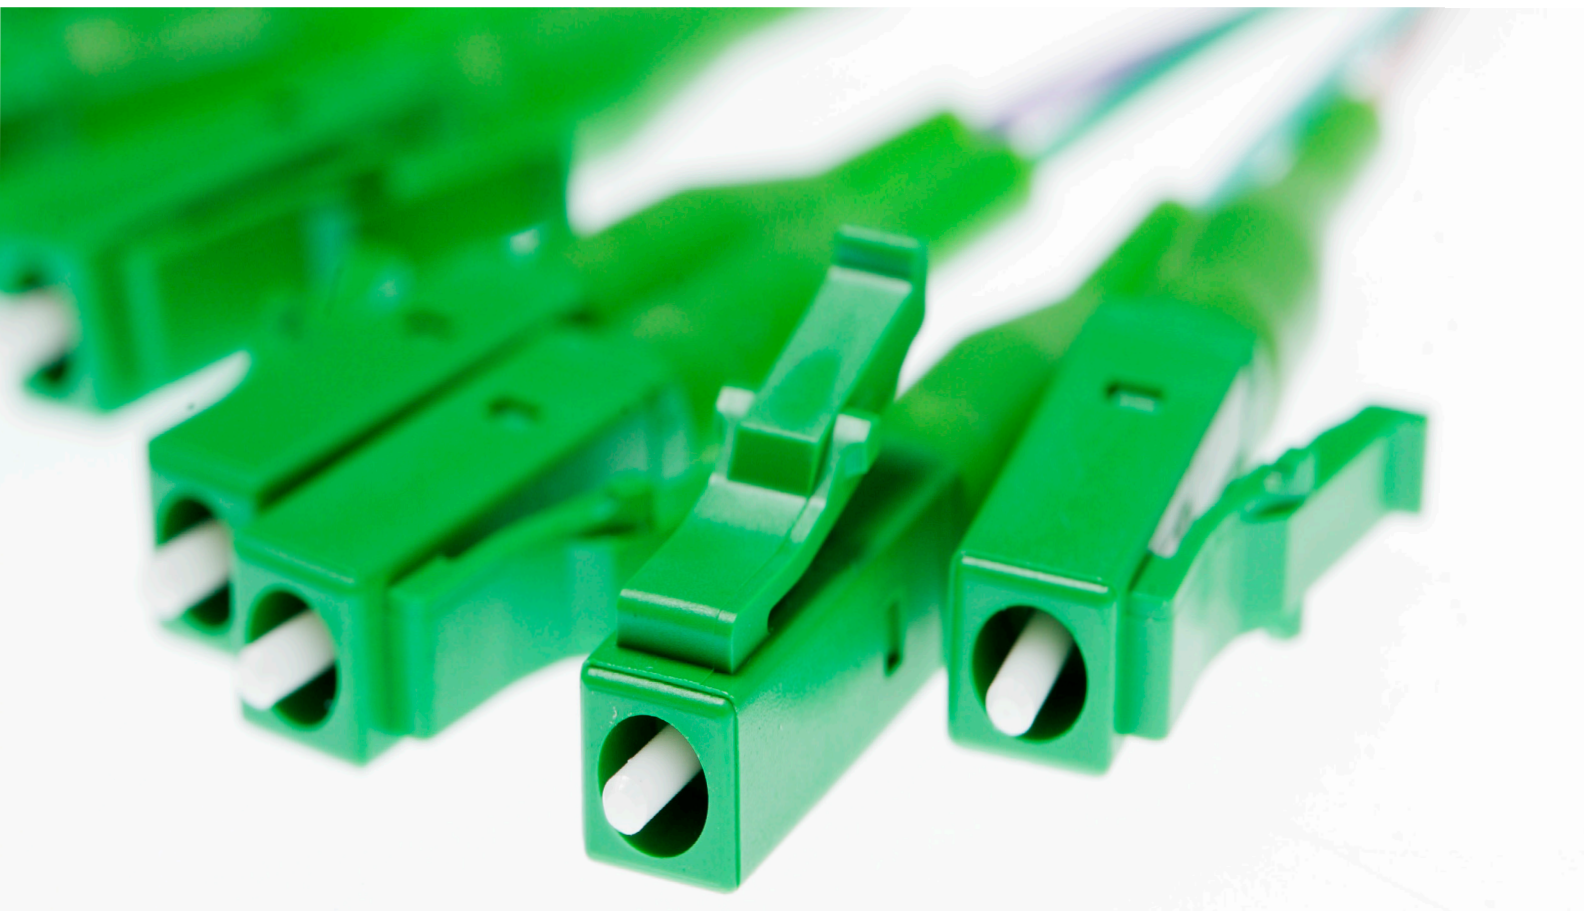

TECHNICAL SPECIFICATIONS

FIBER TRACTION RESISTANCE - CONNECTOR (N)	5
TEMPORARY / PERMANENT BENDING RADIUS	> 20 / >40
OPERATING TEMPERATURE (° C)	-25 / +70
TYPICAL INSERTION LOSS (dB)	SM: 0,15
TYPICAL RETURN LOSS (dB)	PC: >50 - APC: >65
EXTERNAL JACKET	LSZH o Nylon (tight or semitight easy strip)
TYPE OF FIBER	G.657A
COATING DIAMETER (µm)	0,850 ±50
TYPICAL LENGTH (m) 2	2
CONNECTORS ASSEMBLABLE	SC/PC - SC/APC - LC/PC - LC/APC

PRODUCT DETAILS



Applicable standards IEC 61754-4 TIA 604-3 IEC 61754-20 TIA 604-10-A