




ADAPTER DUPLEX

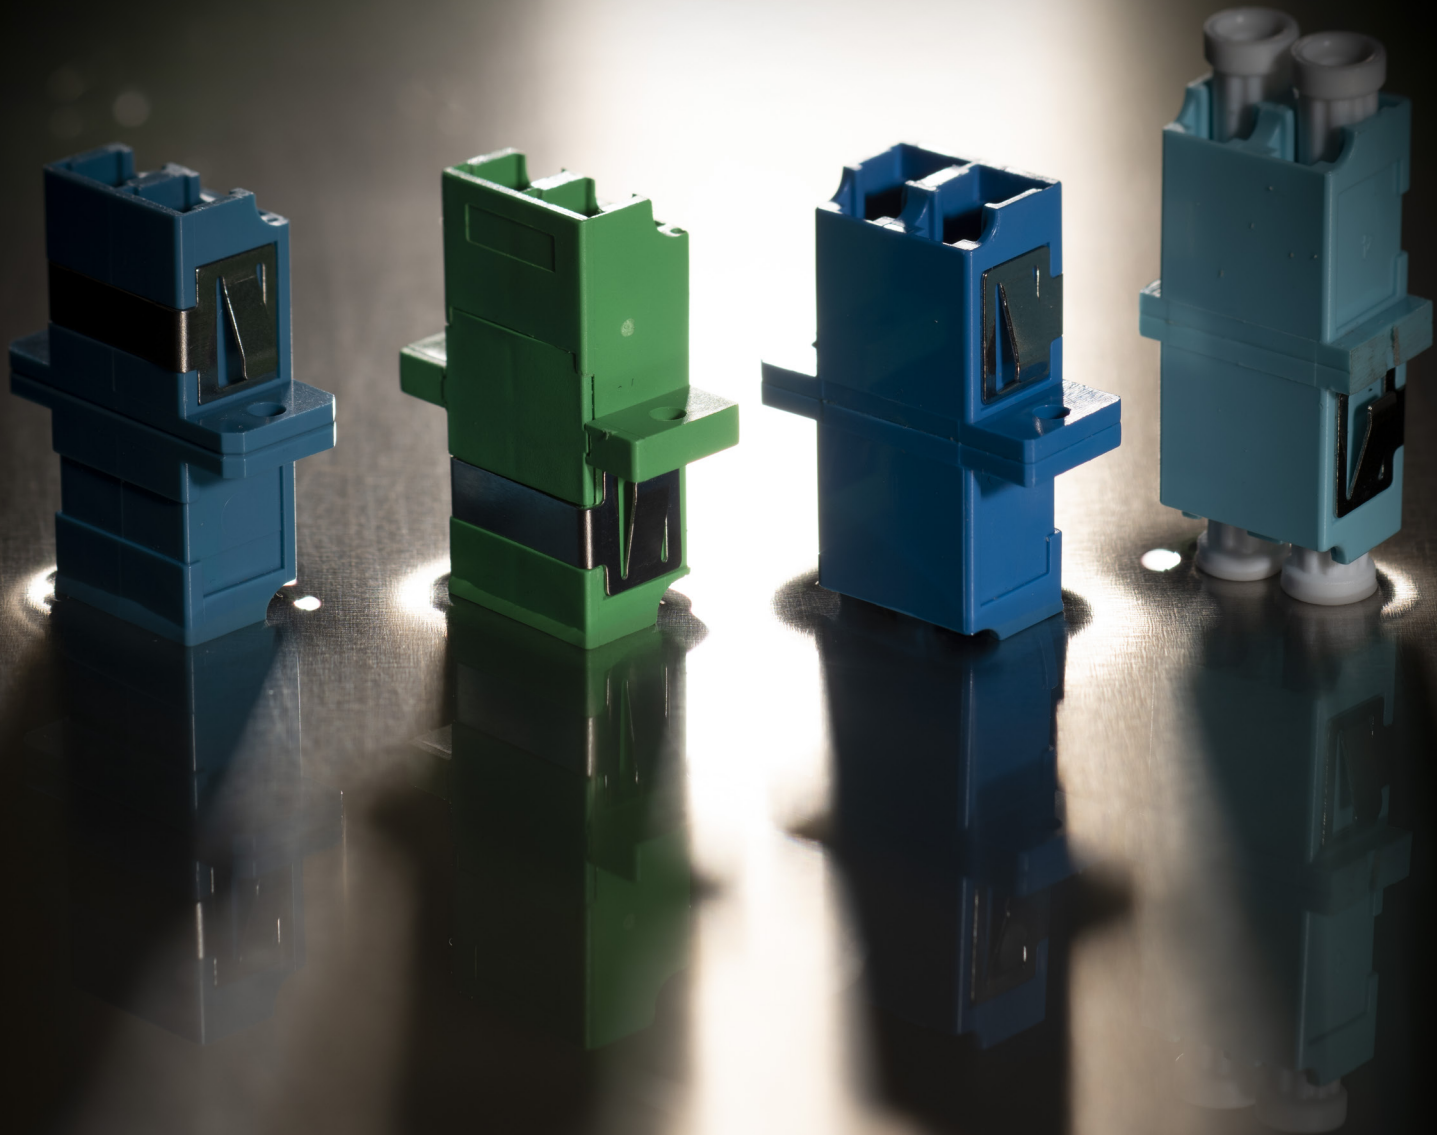

Available with or without flange
Allows any type of connection
Sleeve in zirconia (SM) or bronze (MM)

ADAPTER DUPLEX

Duplex adapters allow quick connection between two optical connectors. Ensuring the maximum alignment between the fibers giving a contextual saving in terms of space.

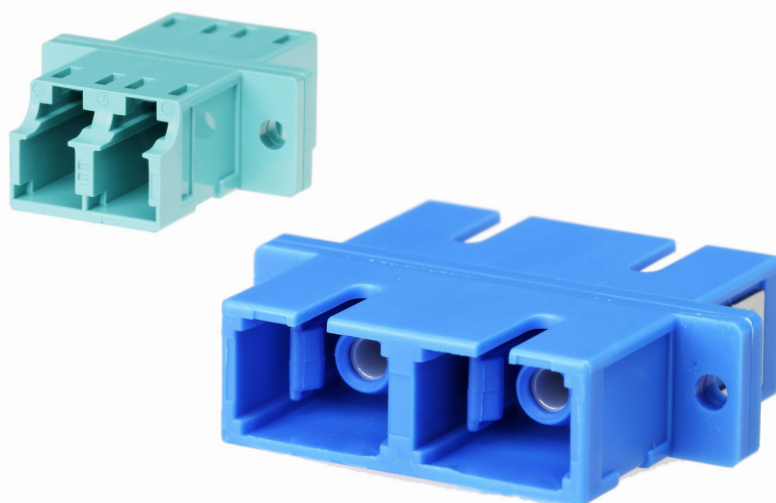

TECHNICAL SPECIFICATIONS

TYPE OF ADAPTER	SC	LC	E2000	MT-RJ
DURATION (INSERTION CYCLES)	1000			
OPERATING TEMPERATURE	da -40C° a +85C°			
MATERIALS UL94	✓			
BODY COLOR ADAPTER				
SM PC	Blu			Black
SM APC	Green			n/a
MM	Beige / Acqua		Beige	Black
TYPE OF FIBER				
SM-R 9/125	✓			
MM-R 50/125 OM2-OM3-OM4	✓			
MM-R 2.5/125 OM1	✓			
SPECIFICATIONS				
SLEEVE MATERIAL	Zirconia (SM) - Bronze (MM)			n/a
TYPICAL INSERTION LOSS (dB)				
SM PC (@1310 - 1550nm)	0,10			
SM APC (@1310 - 1550nm)	0,10			
MM (@850 - 1300nm)	0,20			

PRODUCT DETAILS

