


# IN LINE CLOSURE

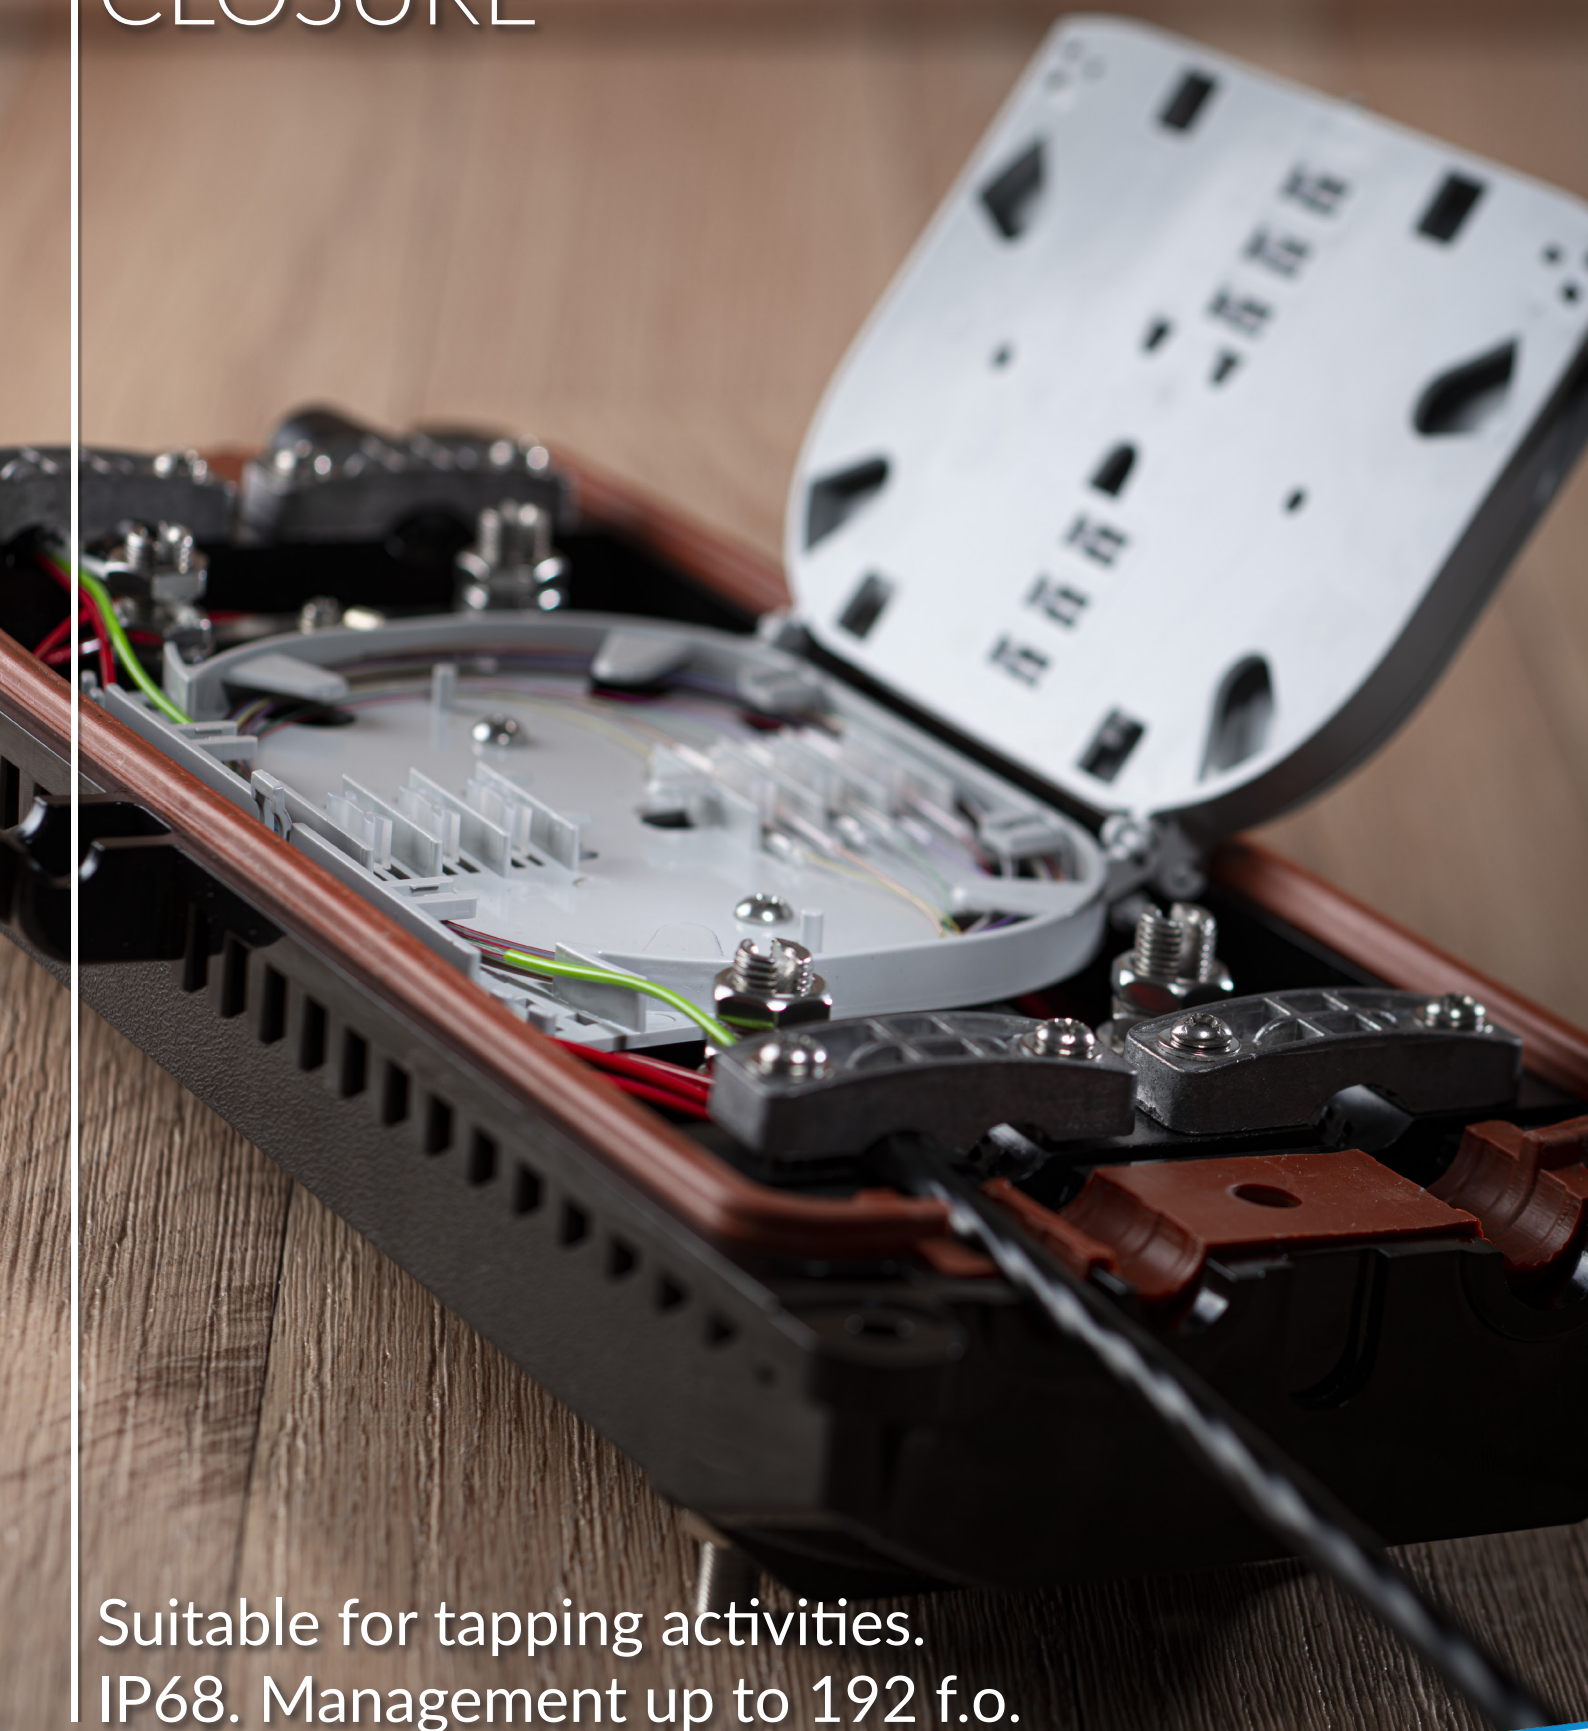

Suitable for tapping activities.  
IP68. Management up to 192 f.o.

# IN LINE CLOSURE

The in-line closures, are characterized by an elongated shape, they are designed to protect the fiber optic joints. Available from 24 to 192 optical fibers.



## TECHNICAL SPECIFICATIONS

NUMBER OF OPTICAL FIBERS	From 24 a 192	
DIMENSIONS	210x450x90,5 mm (da 24 a 72 fibrers)	216x450x150 mm (da 144 a 192 fibrers)
WEIGHT	2kg (from 24 to 72 fibers)	3kg (144 to 192 fibers)
N. OF JOINTS PER BOARD	24	
MAXIMUM N. OF JOINT BOARDS	8	
N. CIRCULAR CABLE INPUTS	6	
DIAMETER HANDLING CABLES	8 ÷ 16 mm	
PROTECTION DEGREE	IP68	
MATERIAL	ABS	
COLOR	Black	

### PRODUCT DETAILS

