


SINGLEMODE AND MULTIMODE PIGTAILS

Tight and semitight
UPC or APC finishing
LSZH



SINGLEMODE AND MULTIMODE PIGTAILS

Pigtails are used for terminating optical cables using the fusion splicing technique. The different color of the coating helps the operator to identify the fibers.

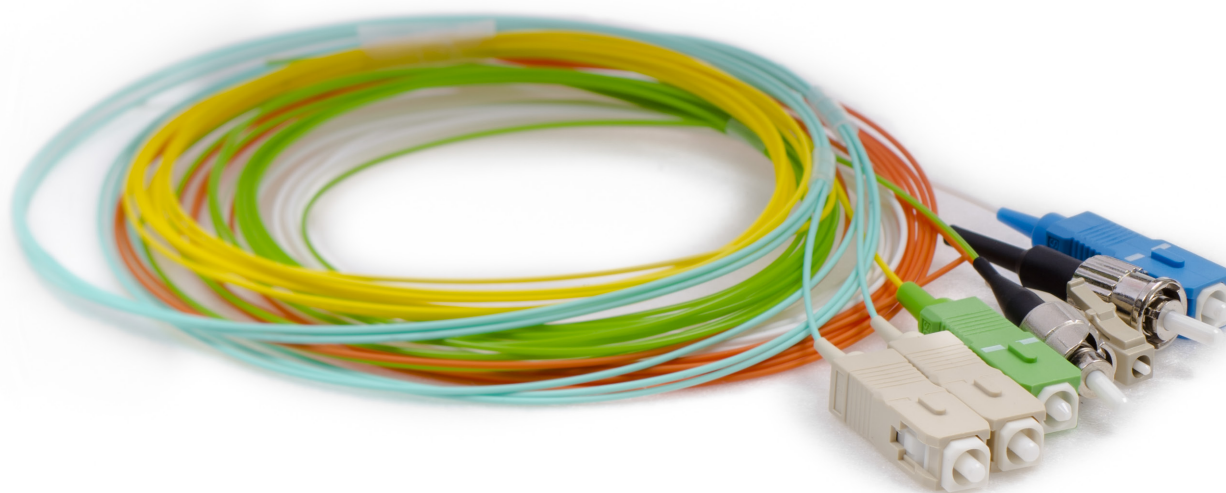

TECHNICAL SPECIFICATIONS

FIBER TRACTION RESISTANCE - CONNECTOR (N)	5
TEMPORARY / PERMANENT BENDING RADIUS	> 20 / >40
OPERATING TEMPERATURE (° C)	-25 / +70
TYPICAL INSERTION LOSS (dB)	SM: 0,15 - MM: 0,30
TYPICAL RETURN LOSS (dB)	PC: >50 - APC: >65
EXTERNAL JACKET	LSZH o Nylon (tight or semitight easy strip)
TYPE OF FIBER	SM: G.652D, G657A (bend insensitive) MM: 62,5/125 (OM1), 50/125 (OM2, OM3, OM4)
COATING DIAMETER (µm)	0,850 ±50
TYPICAL LENGTH (m) 2	2
CONNECTORS ASSEMBLABLE	SC - LC - FC - ST - MU - E2000
FERRULE FINISHING	UPC - APC

PRODUCT DETAILS



Applicable standards IEC 61754-4 TIA 604-3 IEC 61754-20 TIA 604-10-A