



SOC FIBERNET CONNECTOR

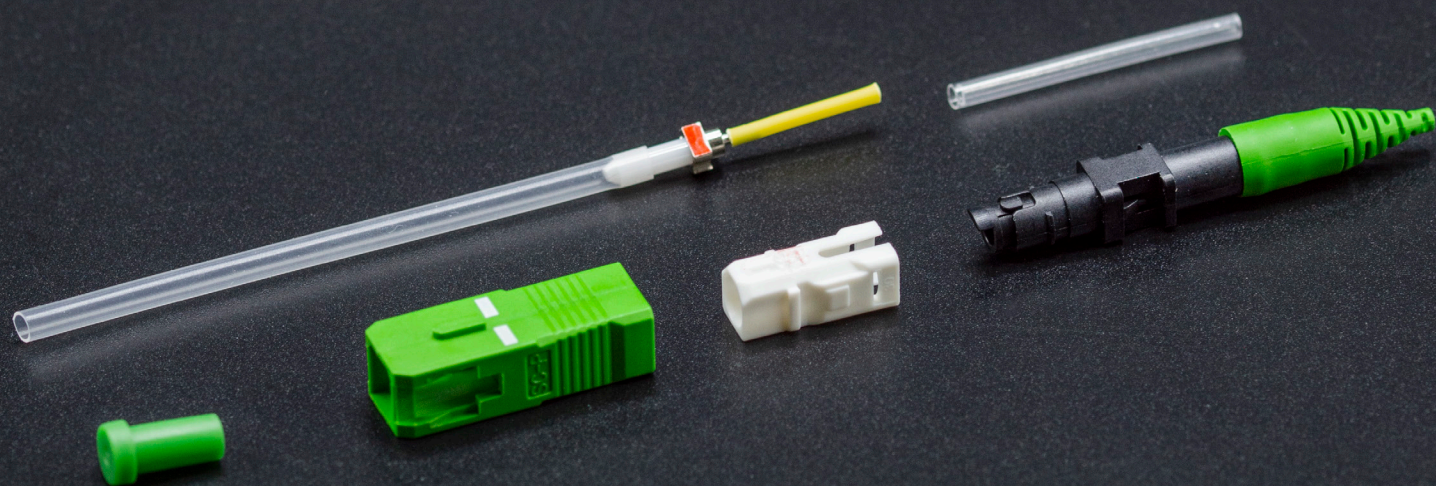

Universal, it is suitable to any kind of splicer
Easy to assemble
APC finish

SOC FIBERNET CONNECTOR

Totally developed by Fibernet, these fusion connectors are universal and therefore usable, thanks to its holder, with the most common splicers on the market (Inno Instrument, Fujikura, Sumitomo Electric, Fiberfox).

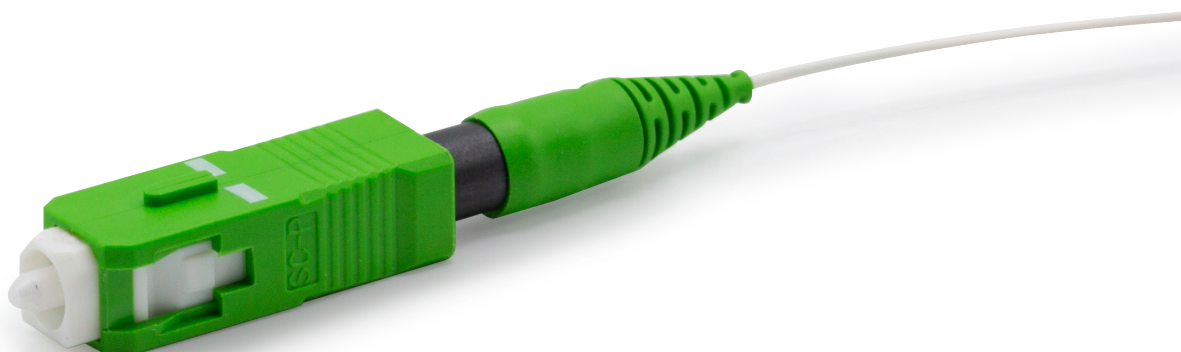

TECHNICAL SPECIFICATIONS

WORKABLE FIBER	900 μ m
INSERTION LOSS	Typ. 0.15 dB - Max 0.30 dB
RETURN LOSS	Min. 60 dB
FERULE	Prelapped SC/APC
OPERATING TEMPERATURE	-20 / +75 °C
DURATION (REPEATED INSERTIONS)	500 Cycles
QUANTITY	100 connector + 10 holder
TIM CODE	NMU 782521

PRODUCT DETAILS

