


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:58 PM

00001.LO.EXT.SOR

0.5 km/0.100 m

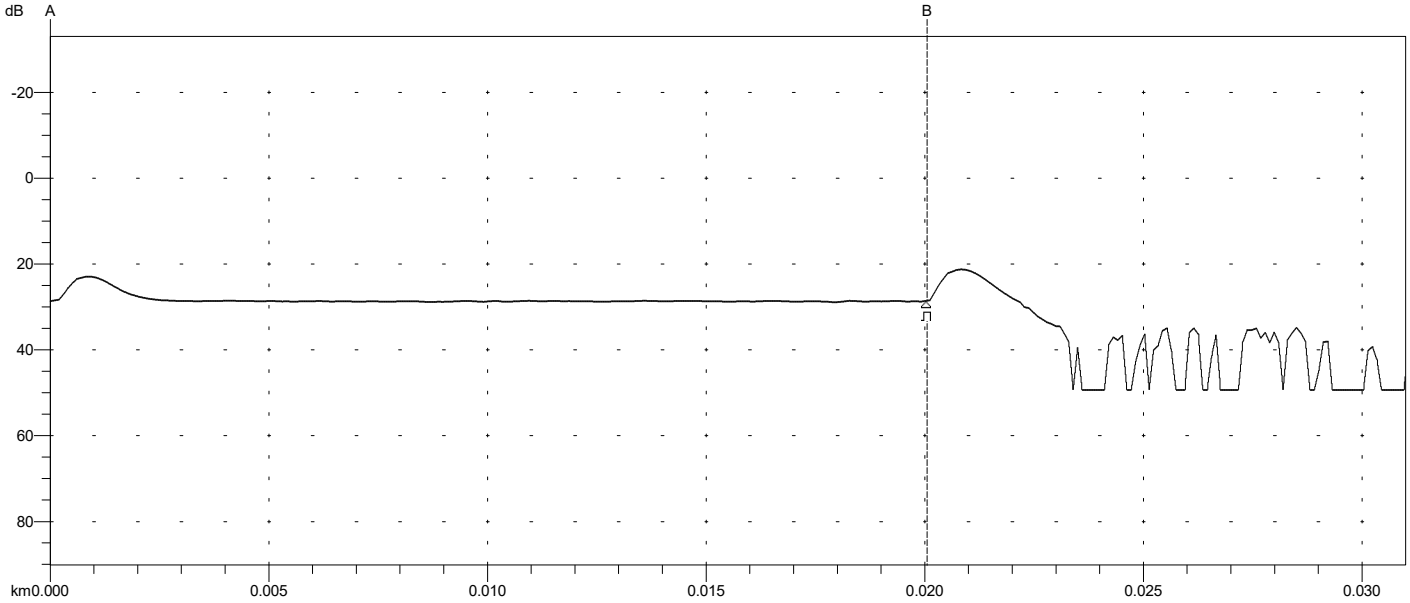

A: 0.0000 km		Index: 1.468200	[H] 3ns / 0.3m
B: 0.0200 km		2-Point Loss: -0.091 dB	Avg: Fast 13312
A -> B: 0.0200 km		Reflectance: N/A	/1550 nm/SM

Analysis Results -- 00001.LO.EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0200	-0.02 -1.132	>3.00	>-61.97

Overall (End-to-End) Loss: -0.02 dB

Primary Trace: 00001.LO.EXT.SOR
Date: 07/28/23 Range: 0.5 km
Time: 08:15 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode Wavelength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A


----- Page 1 -----	
Language: IT	
Cable ID:	
Fiber ID: 1	
Wavelength: 1550	
Org. Loc:	
Term. Loc:	
Cable Code:	
Condition: OT	
Operator:	
Comment:	
Supplier: Anritsu	
OTDR Model: MT9085B-055	
S/N: 6272458690	
Optics Mod:	
S/N:	
S/W Rev.: 2.00	
Other:	

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:58 PM

00001.LO.INT.SOR

0.5 km/0.100 m

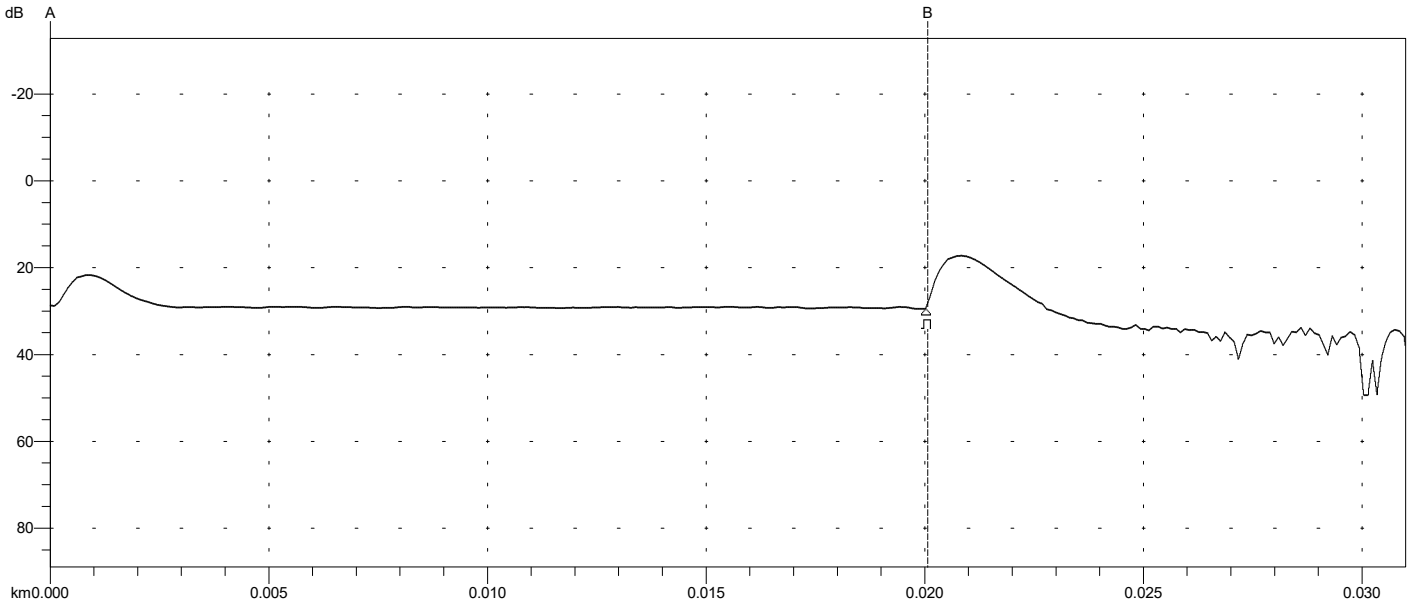

A: 0.0000 km		Index: 1.468200	[H] 3ns / 0.3m
B: 0.0201 km		2-Point Loss: -0.560 dB	Avg: Fast 13312
A -> B: 0.0201 km		Reflectance: N/A	/1550 nm/SM

Analysis Results -- 00001.LO.INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0200	0.74 36.872	>3.00	>-52.34

Overall (End-to-End) Loss: 0.74 dB

Primary Trace: 00001.LO.INT.SOR
Date: 07/28/23 Range: 0.5 km
Time: 08:11 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A


----- Page 1 -----	
Language: IT	
Cable ID:	
Fiber ID: 1	
Wavelength: 1550	
Org. Loc:	
Term. Loc:	
Cable Code:	
Condition: OT	
Operator:	
Comment:	
Supplier: Anritsu	
OTDR Model: MT9085B-055	
S/N: 6272458690	
Optics Mod:	
S/N:	
S/W Rev.: 2.00	
Other:	

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:03 PM

00023.LO.EXT.SOR

0.5 km/0.100 m

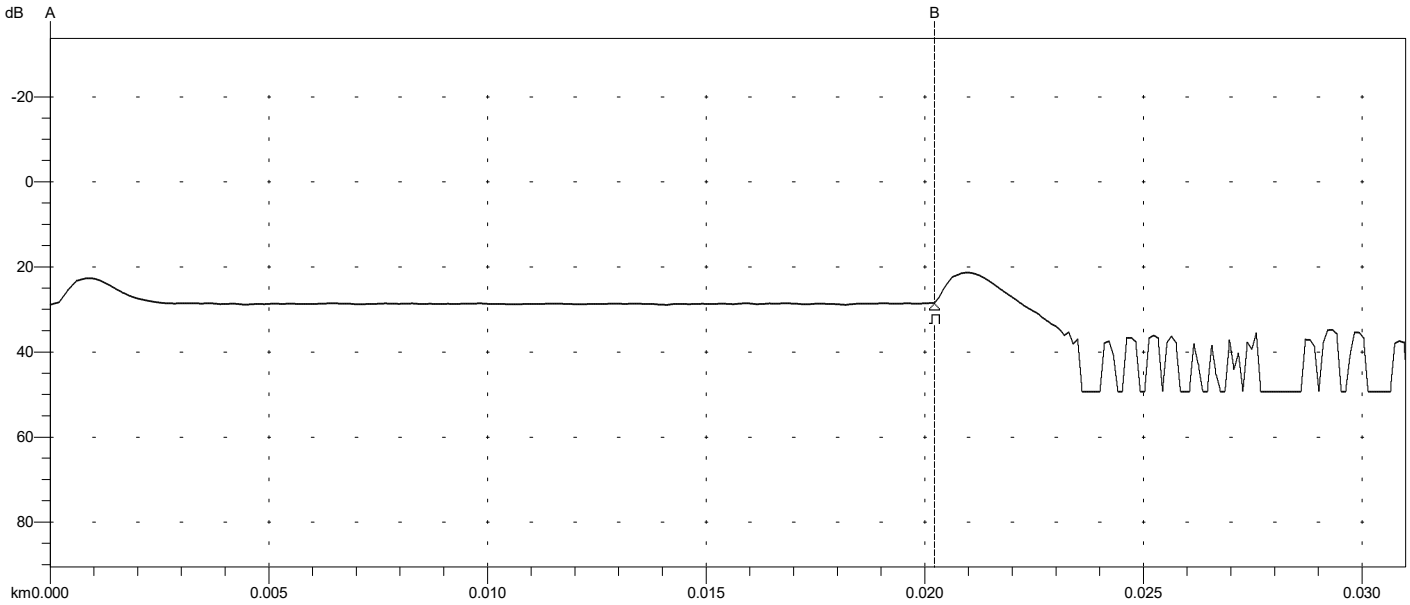

A: 0.0000 km	Index: 1.468200	[H] 3ns / 0.3m
B: 0.0202 km	2-Point Loss: -0.366 dB	Avg: Fast 13312
A -> B: 0.0202 km	Reflectance: N/A	/1550 nm/SM

Analysis Results -- 00023.LO.EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	-0.13 -6.229	>3.00	>-62.44

Overall (End-to-End) Loss: -0.13 dB

Primary Trace: 00023.LO.EXT.SOR
Date: 07/28/23 Range: 0.5 km
Time: 11:19 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A


----- Page 1 -----
Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 06:03 PM

00023.LO.INT.SOR

0.5 km/0.100 m

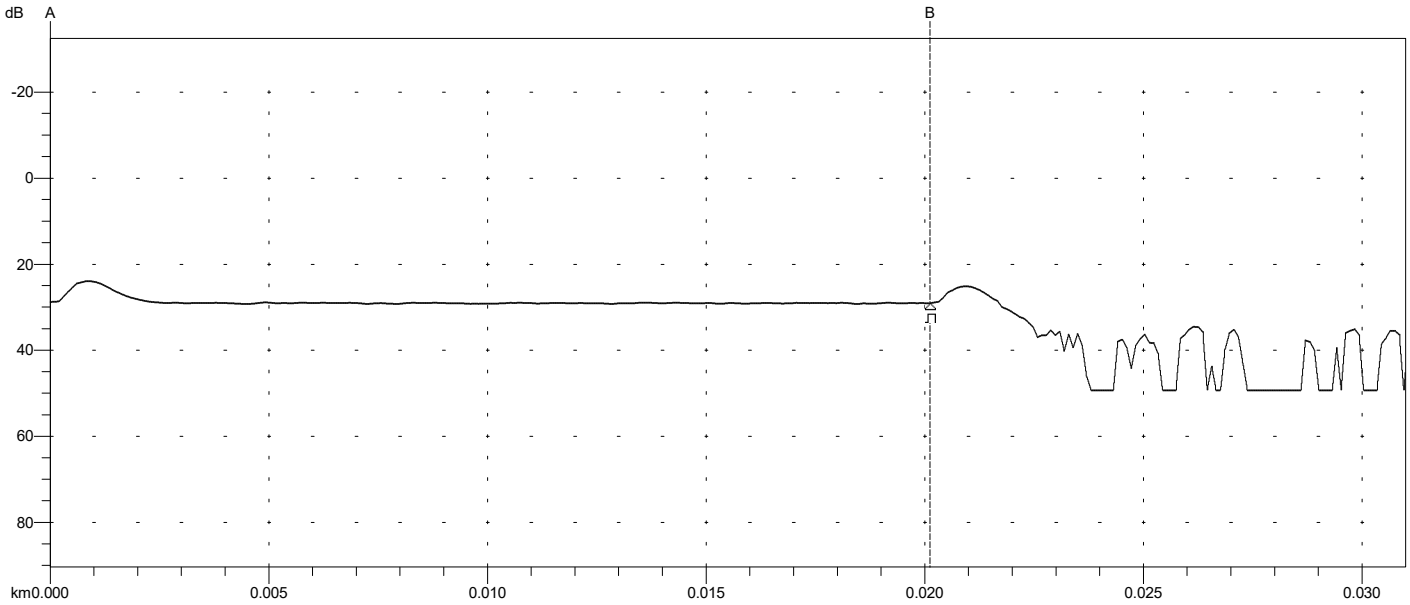

A: 0.0000 km	Index: 1.468200	[H] 3ns / 0.3m
B: 0.0201 km	2-Point Loss: 0.283 dB	Avg: Fast 13312
A -> B: 0.0201 km	Reflectance: N/A	/1550 nm/SM

Analysis Results -- 00023.LO.INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.38 18.930	>3.00	>-69.63

Overall (End-to-End) Loss: 0.38 dB

Primary Trace: 00023.LO.INT.SOR
Date: 07/28/23 Range: 0.5 km
Time: 11:12 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A

Language: IT	Page 1
Cable ID:	
Fiber ID: 1	
Wavelength: 1550	
Org. Loc:	
Term. Loc:	
Cable Code:	
Condition: OT	
Operator:	
Comment:	
Supplier: Anritsu	
OTDR Model: MT9085B-055	
S/N: 6272458690	
Optics Mod:	
S/N:	
S/W Rev.: 2.00	
Other:	