


FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:42 PM

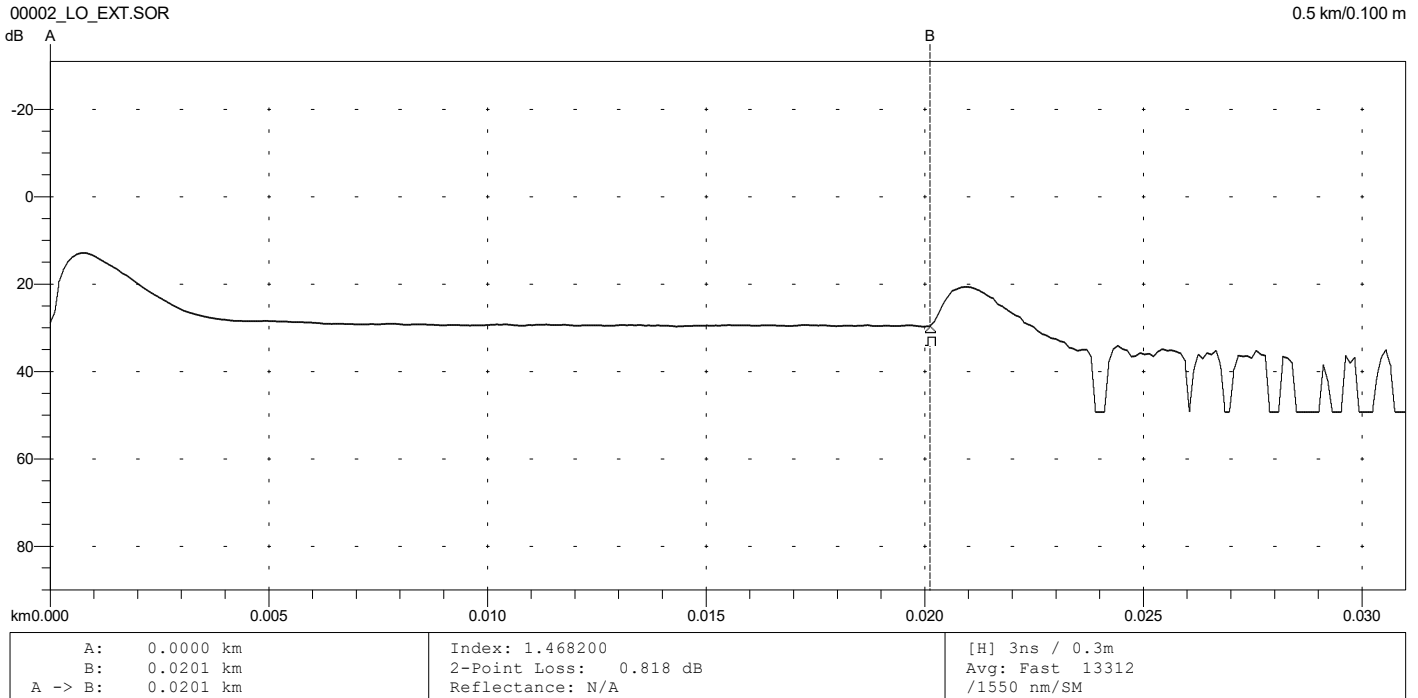

Analysis Results -- 00002_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.99 49.139	>3.00	>-58.74


Overall (End-to-End) Loss: 0.99 dB

Primary Trace: 00002_LO_EXT.SOR
Date: 08/03/23 Range: 0.5 km
Time: 11:48 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode Wavelength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A

Language: IT	
Cable ID:	
Fiber ID: 1	
Wavelength: 1550	
Org. Loc:	
Term. Loc:	
Cable Code:	
Condition: OT	
Operator:	
Comment:	
Supplier: Anritsu	
OTDR Model: MT9085B-055	
S/N: 6272458690	
Optics Mod:	
S/N:	
S/W Rev.: 2.00	
Other:	

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:43 PM

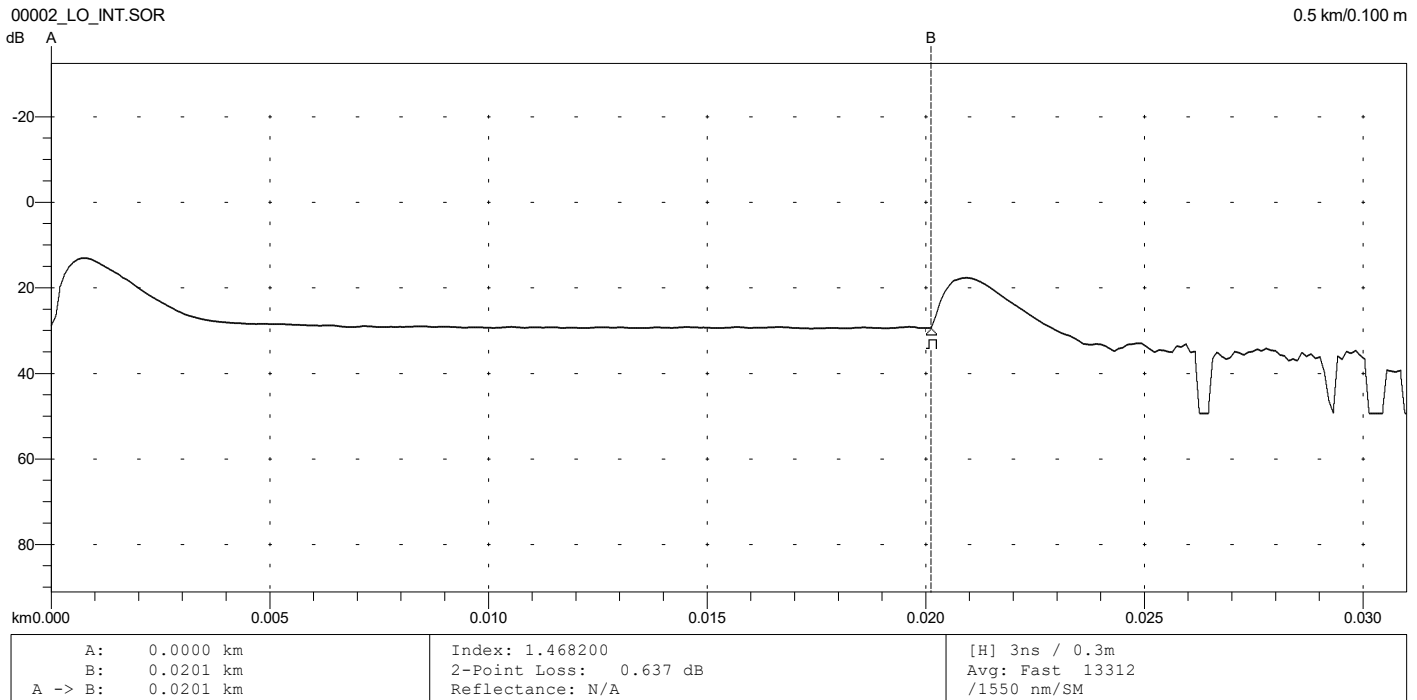

Analysis Results -- 00002_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.74 36.982	>3.00	>-53.24

Overall (End-to-End) Loss: 0.74 dB


Primary Trace: 00002_LO_INT.SOR
Date: 08/03/23 Range: 0.5 km
Time: 11:50 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A

----- Page 1 -----

Language: IT	
Cable ID:	
Fiber ID: 1	
Wavelength: 1550	
Org. Loc:	
Term. Loc:	
Cable Code:	
Condition: OT	
Operator:	
Comment:	
Supplier: Anritsu	
OTDR Model: MT9085B-055	
S/N: 6272458690	
Optics Mod:	
S/N:	
S/W Rev.: 2.00	
Other:	

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:52 PM

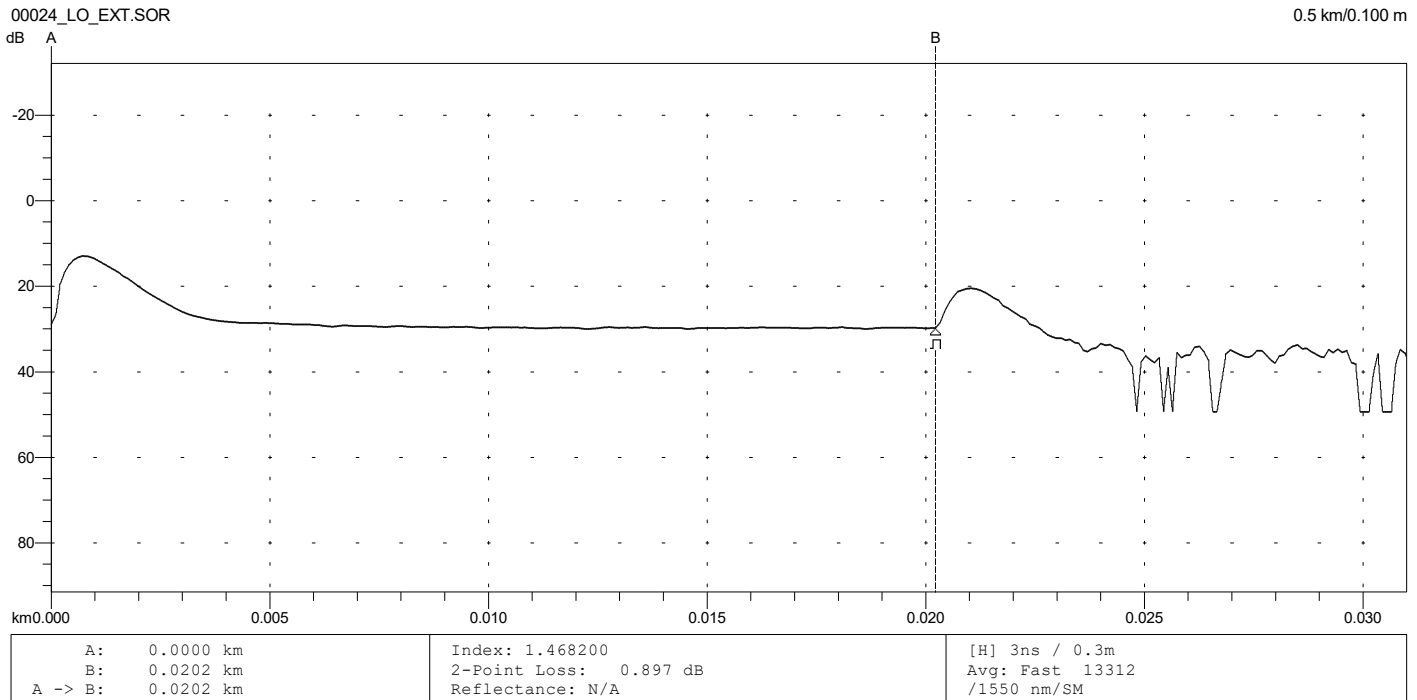

Analysis Results -- 00024_LO_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	1.07 52.895	>3.00	>-58.16

Overall (End-to-End) Loss: 1.07 dB

Primary Trace: 00024_LO_EXT.SOR
Date: 08/03/23 Range: 0.5 km
Time: 01:19 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A


----- Page 1 -----
Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00
Date: 08/04/2023 Time: 05:52 PM

00024_LO_INT.SOR

0.5 km/0.100 m

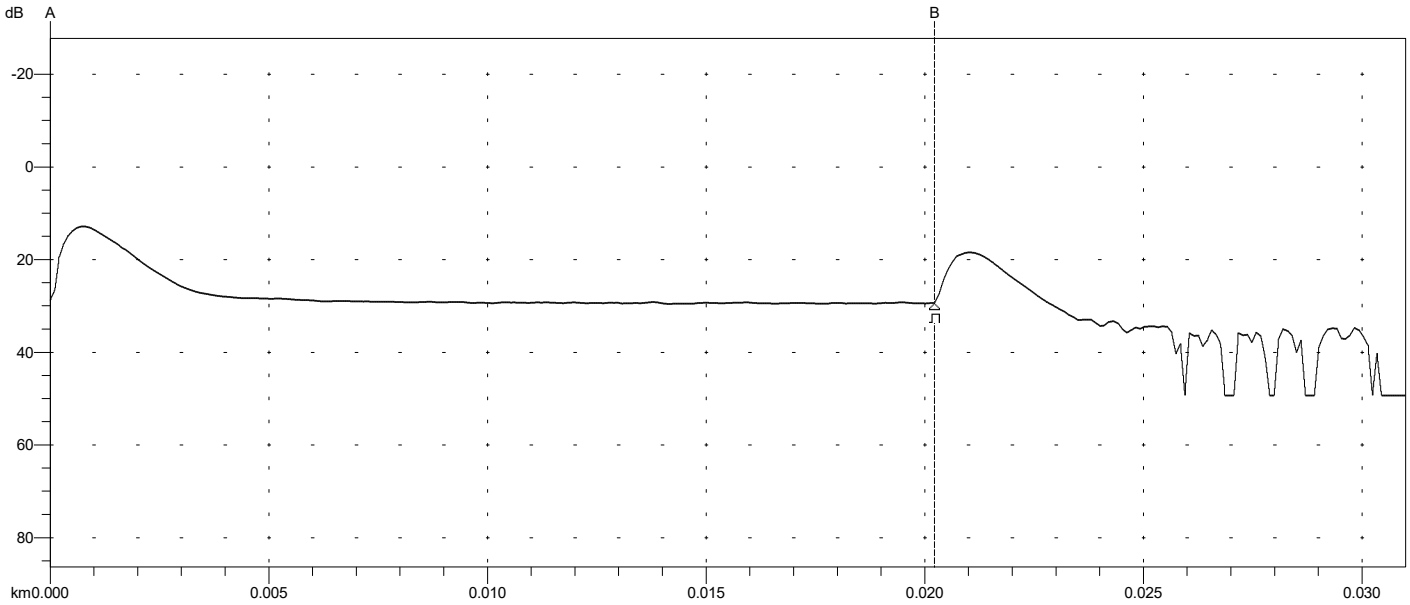

A: 0.0000 km	Index: 1.468200	[H] 3ns / 0.3m
B: 0.0202 km	2-Point Loss: 0.681 dB	Avg: Fast 13312
A -> B: 0.0202 km	Reflectance: N/A	/1550 nm/SM

Analysis Results -- 00024_LO_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.69 34.291	>3.00	>-54.77

Overall (End-to-End) Loss: 0.69 dB

Primary Trace: 00024_LO_INT.SOR
Date: 08/03/23 Range: 0.5 km
Time: 01:20 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A

Language: IT	Page 1
Cable ID:	
Fiber ID: 1	
Wavelength: 1550	
Org. Loc:	
Term. Loc:	
Cable Code:	
Condition: OT	
Operator:	
Comment:	
Supplier: Anritsu	
OTDR Model: MT9085B-055	
S/N: 6272458690	
Optics Mod:	
S/N:	
S/W Rev.: 2.00	
Other:	