


# FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00  
Date: 08/04/2023 Time: 05:49 PM

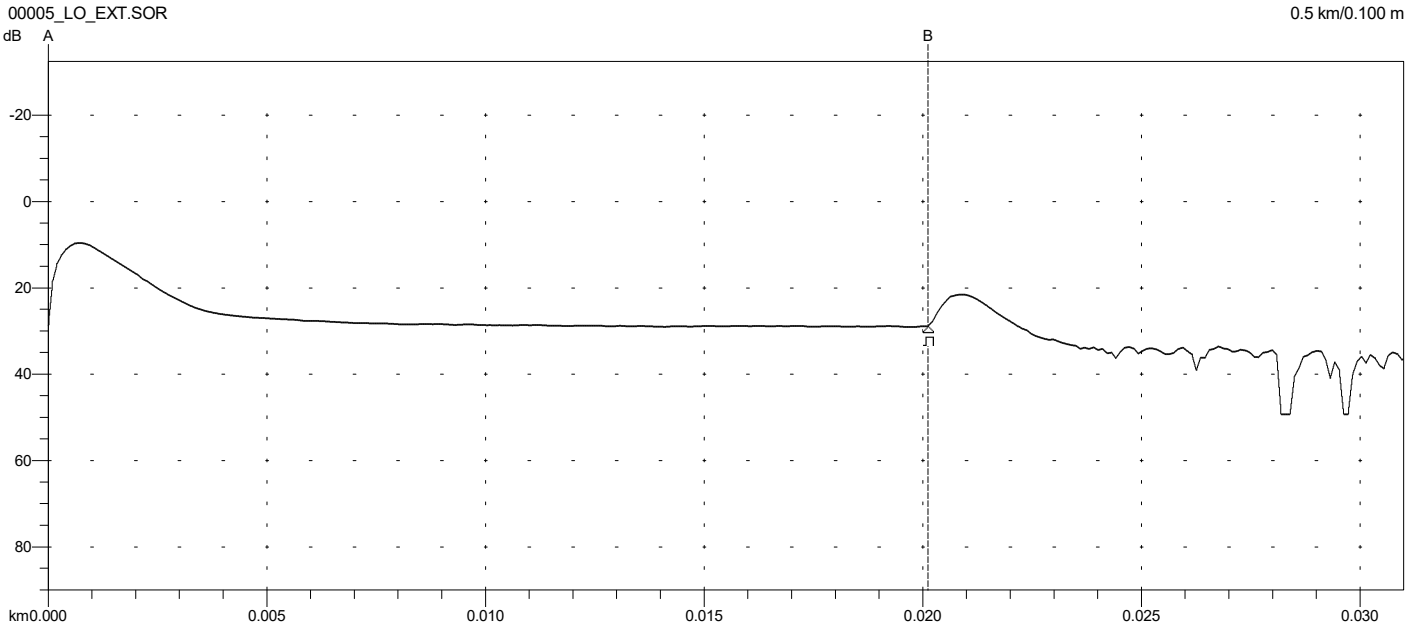

|   |   |  |
|---|---|--|
| A: 0.0000 km<br>B: 0.0201 km<br>A -> B: 0.0201 km | Index: 1.468200<br>2-Point Loss: 0.198 dB<br>Reflectance: N/A | [H] 3ns / 0.3m<br>Avg: Fast 13312<br>/1550 nm/SM |
|---|---|--|

Analysis Results -- 00005\_LO\_EXT.SOR

| Feature #/Type | Location (km) | Event-Event (dB) (dB/Km) | Loss (dB) | Refl (dB) |
|----------------|---------------|--------------------------|-----------|-----------|
| 1/E            | 0.0201        | ?? ??                    | >3.00     | >-62.05   |

Overall (End-to-End) Loss: ??

```


Primary Trace: 00005_LO_EXT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 08:05 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

|                         |
|-------------------------|
| Language: IT            |
| Cable ID:               |
| Fiber ID: 1             |
| Wavelength: 1550        |
| Org. Loc:               |
| Term. Loc:              |
| Cable Code:             |
| Condition: OT           |
| Operator:               |
| Comment:                |
| Supplier: Anritsu       |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690         |
| Optics Mod:             |
| S/N:                    |
| S/W Rev.: 2.00          |
| Other:                  |

# FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00  
Date: 08/04/2023 Time: 05:49 PM

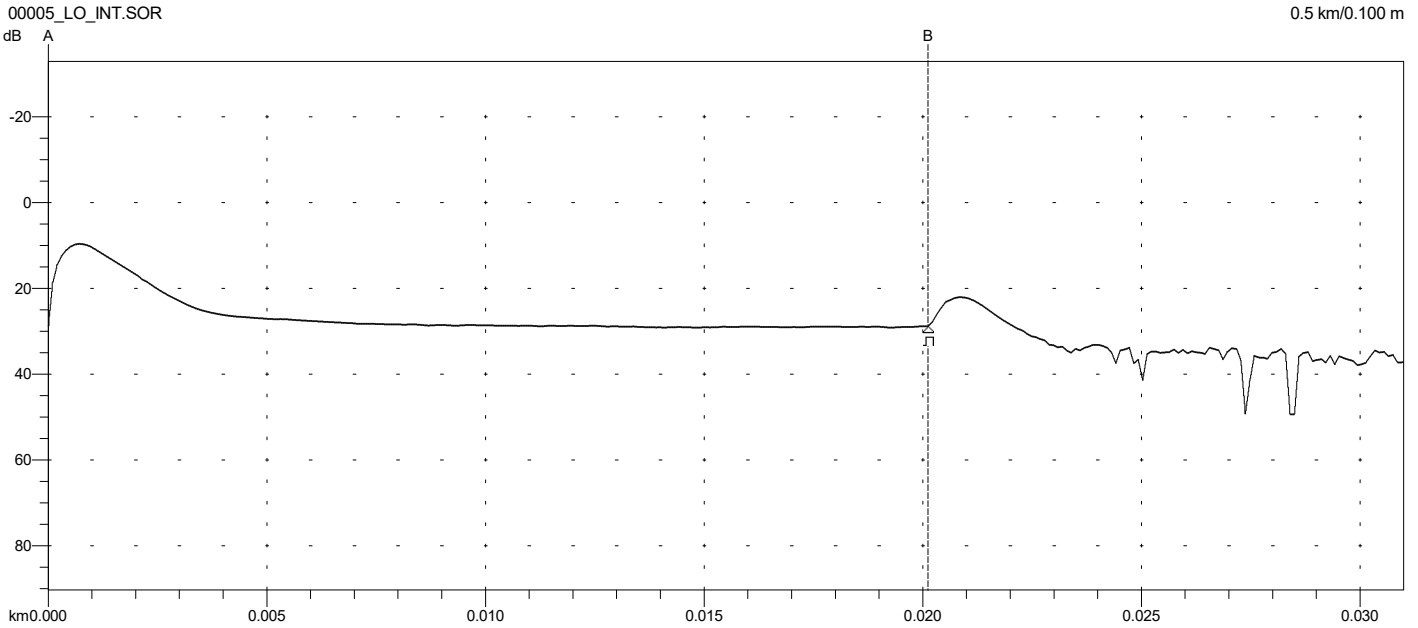

|   |   |  |
|---|---|--|
| A: 0.0000 km<br>B: 0.0201 km<br>A -> B: 0.0201 km | Index: 1.468200<br>2-Point Loss: 0.053 dB<br>Reflectance: N/A | [H] 3ns / 0.3m<br>Avg: Fast 13312<br>/1550 nm/SM |
|---|---|--|

Analysis Results -- 00005\_LO\_INT.SOR

| Feature #/Type | Location (km) | Event-Event (dB) (dB/Km) | Loss (dB) | Refl (dB) |
|----------------|---------------|--------------------------|-----------|-----------|
| 1/E            | 0.0201        | ?? ??                    | >3.00     | >-63.33   |

Overall (End-to-End) Loss: ??

```


Primary Trace: 00005_LO_INT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 08:07 AM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

```

----- Page 1 -----
| Language: IT |
| Cable ID: |
| Fiber ID: 1 |
| Wavelength: 1550 |
| Org. Loc: |
| Term. Loc: |
| Cable Code: |
| Condition: OT |
| Operator: |
| Comment: |
| Supplier: Anritsu |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690 |
| Optics Mod: |
| S/N: |
| S/W Rev.: 2.00 |
| Other: |
|-----|
    
```

# FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00  
Date: 08/04/2023 Time: 05:54 PM

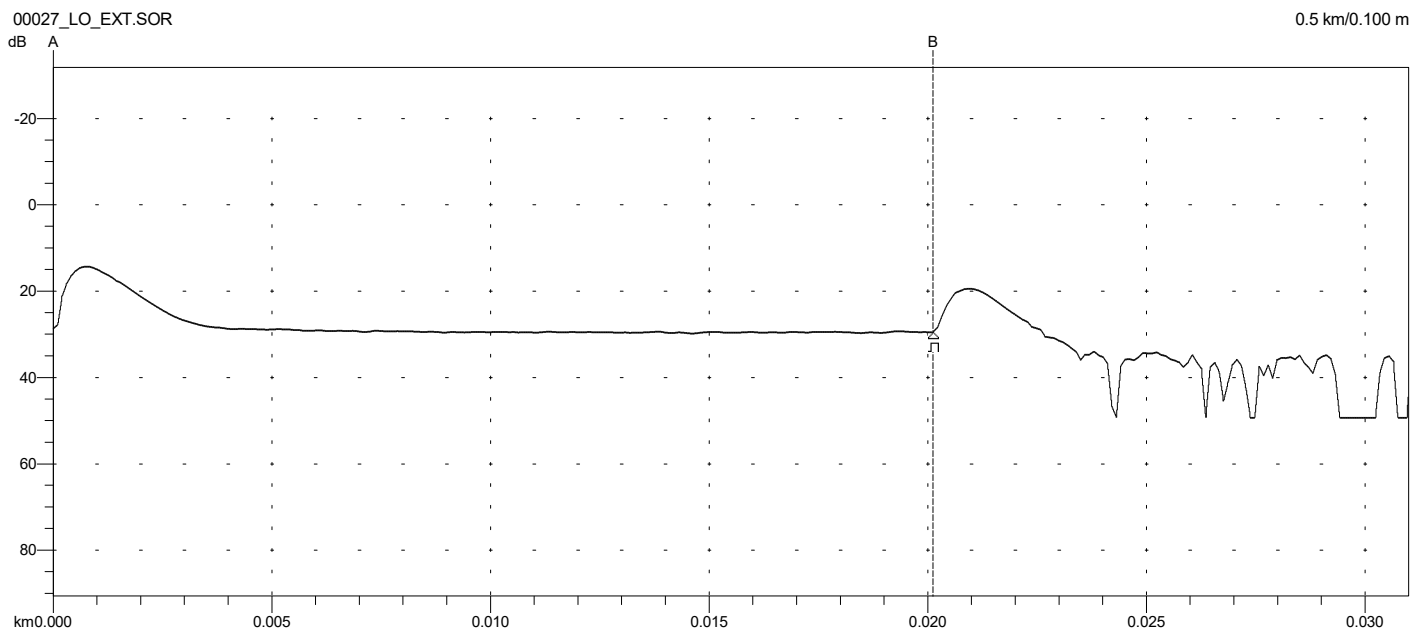

|   |   |  |
|---|---|--|
| A: 0.0000 km<br>B: 0.0201 km<br>A -> B: 0.0201 km | Index: 1.468200<br>2-Point Loss: 0.820 dB<br>Reflectance: N/A | [H] 3ns / 0.3m<br>Avg: Fast 13312<br>/1550 nm/SM |
|---|---|--|

Analysis Results -- 00027\_LO\_EXT.SOR

| Feature #/Type | Location (km) | Event-Event (dB) (dB/Km) | Loss (dB) | Refl (dB) |
|----------------|---------------|--------------------------|-----------|-----------|
| 1/E            | 0.0201        | 0.85 42.332              | >3.00     | >-56.59   |

Overall (End-to-End) Loss: 0.85 dB

```


Primary Trace: 00027_LO_EXT.SOR
Date: 08/03/23 Range: 0.5 km
Time: 02:04 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

|                         |
|-------------------------|
| Language: IT            |
| Cable ID:               |
| Fiber ID: 1             |
| Wavelength: 1550        |
| Org. Loc:               |
| Term. Loc:              |
| Cable Code:             |
| Condition: OT           |
| Operator:               |
| Comment:                |
| Supplier: Anritsu       |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690         |
| Optics Mod:             |
| S/N:                    |
| S/W Rev.: 2.00          |
| Other:                  |

# FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00  
Date: 08/04/2023 Time: 05:54 PM

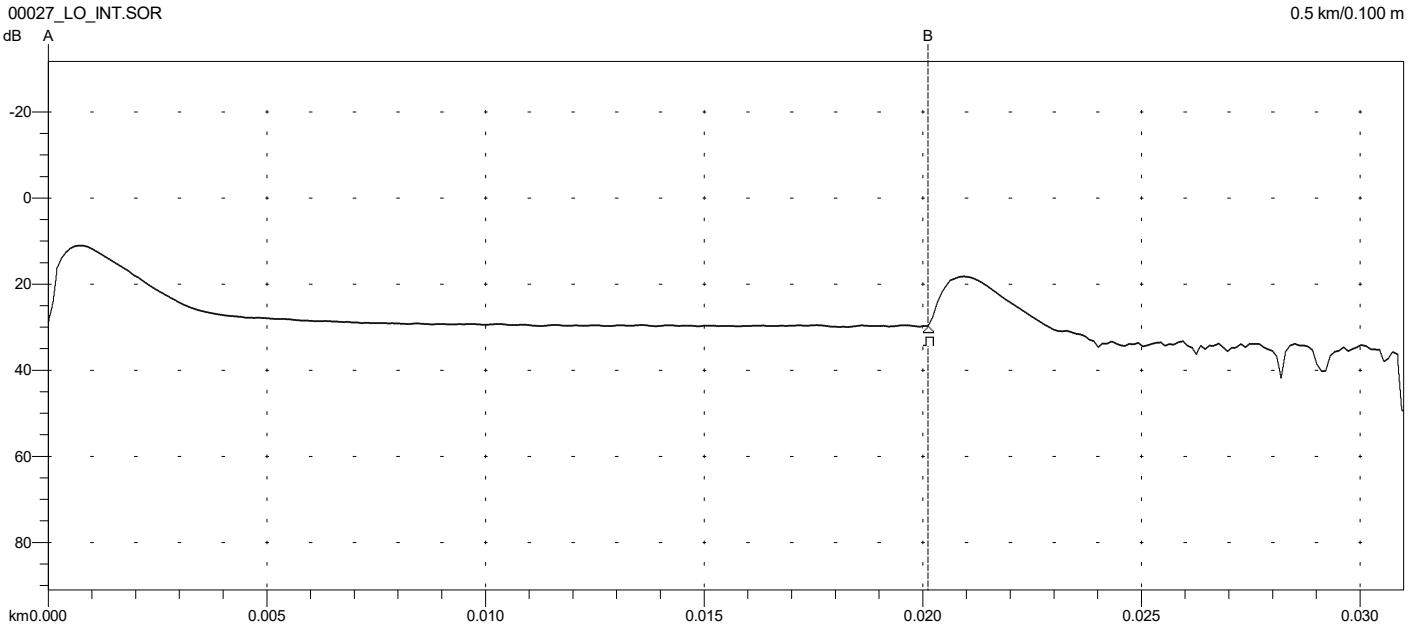

|   |   |  |
|---|---|--|
| A: 0.0000 km<br>B: 0.0201 km<br>A -> B: 0.0201 km | Index: 1.468200<br>2-Point Loss: 0.988 dB<br>Reflectance: N/A | [H] 3ns / 0.3m<br>Avg: Fast 13312<br>/1550 nm/SM |
|---|---|--|

Analysis Results -- 00027\_LO\_INT.SOR

| Feature #/Type | Location (km) | Event-Event (dB) (dB/Km) | Loss (dB) | Refl (dB) |
|----------------|---------------|--------------------------|-----------|-----------|
| 1/E            | 0.0201        | 1.11 55.002              | >3.00     | >-53.57   |

Overall (End-to-End) Loss: 1.11 dB

```

Primary Trace: 00027_LO_INT.SOR
Date: 08/03/23 Range: 0.5 km
Time: 02:05 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

|                         |
|-------------------------|
| Language: IT            |
| Cable ID:               |
| Fiber ID: 1             |
| Wavelength: 1550        |
| Org. Loc:               |
| Term. Loc:              |
| Cable Code:             |
| Condition: OT           |
| Operator:               |
| Comment:                |
| Supplier: Anritsu       |
| OTDR Model: MT9085B-055 |
| S/N: 6272458690         |
| Optics Mod:             |
| S/N:                    |
| S/W Rev.: 2.00          |
| Other:                  |