



# LADY

Cable Blowing Machine

Made in Italy



Cable blowing machine for FTTH application  
Cables from  $\varnothing 1.2$  mm up to  $\varnothing 10$  mm and ducts from  $\varnothing 5$  mm up to  $\varnothing 16$  mm



# LADY CABLE BLOWING MACHINE

## TECHNICAL DATA

|                   |                        |  |                    |
|-------------------|------------------------|--|--------------------|
| Max blowing speed | >80 m/min              | Dimensions                               | 235 x 180 x 130 mm |
| Cable diameters   | ø 1.2 to 10 mm         | Dimensions (with case)                   | 475 x 415 x 245 mm |
| Duct diameters    | ø 5 to 16 mm           | Weight                                   | 6 Kg               |
| Max air pressure  | 16 bar                 | Weight (with accessorized case)          | 13,8 Kg            |
| Pushing force     | up to 150 N            | USB port                                 | Yes                |
| Case              | Rugged waterproof case | Max tested jetting distance <sup>1</sup> | 1000 m             |

1. Testing conducted by FIBERNET using real circuits. Distance will vary based on conditions: circuit, curves number, duct type and use.



## ACCESSORIES INCLUDED

|   |   |
|---|---|
| * Duct adapter set (customers' choice 1 pc among)   | ø 5 - 7 - 8 - 10 - 12 - 14 - 16 mm            |
| ** Cable adapter set (customers' choice 1 pc among) | ø 1÷2 - 2÷3 - 3÷4 - 4÷5 - 5÷6 - 6÷9 - 9÷10 mm |
| Hex wrenches  | ø 2 - 3 - 8 mm                                |
| Micro duct cutter                                   | duct range ø 0 - 25 mm (1 pc)                 |
| Air hose with valve                                 | 5 m with quick coupling connector (1 pc)      |
| Lubricant   | 1 L bottle (1 pc)                             |

\* **DUCT ADAPTER SET** includes: Specific duct gaskets (10 pcs)

\*\* **CABLE ADAPTER SET** includes: Specific cable gaskets set (5 pcs per measure) and cable entry guide

Example: duct adapter ø 7 mm - duct gasket ø 7 mm - cable adapter ø 3÷4 mm - cable gasket ø 3 - 3,5 - 4 mm (5 per measure) cable entry guide ø 3÷4 mm

# ELECTRIC DRIVER & MOTOR

## TECHNICAL DATA

|                           |                    |
|---------------------------|--------------------|
| Rugged waterproof case    | 410 x 340 x 205 mm |
| Weight                    | 11 kg              |
| Rated torque              | 2,8 Nm             |
| Battery li-ion            | 2 x 18 V - 5,0 Ah  |
| Fast battery charger      | Yes                |
| Pushlock emergency button | Yes                |
| Torque limiter            | Yes                |

**Touchscreen Display**  
 - To set and visualize laying info



**Lithium batteries**  
 - 2 x 18V - 5Ah


**Torque limiter**  
 - To set maximum thrust  
 and avoid cable damages

**Pushlock emergency button**  
 - Fast stop of jetting operations

**Rugged waterproof case**

**Speed regulation**

**Quick connection**  
 - Easy to lock/unlock

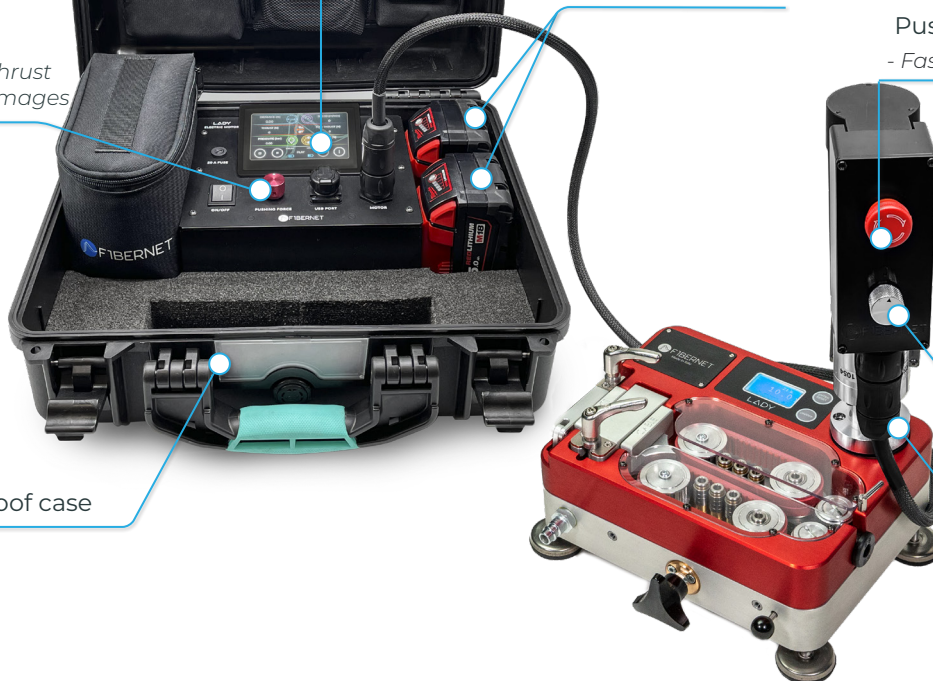




USB port



- All data shown on display are available for download

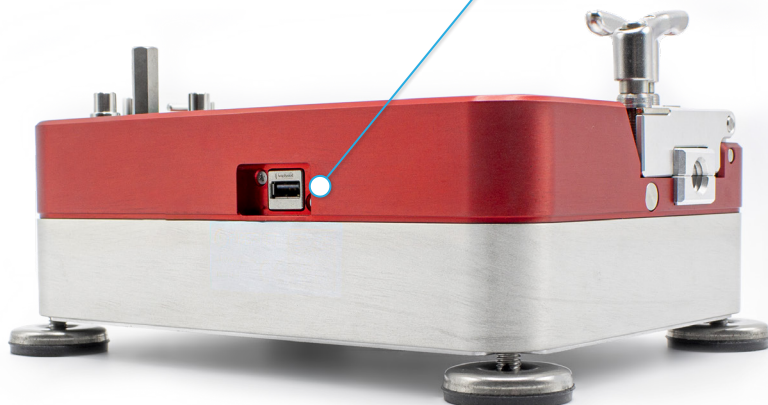

## App for Lady cable blowing machine

Download the report on your device



cable laying  
distance (m)



max speed  
(m/min)



max pressure  
(Bar)



cable laying time



graph



plant info



cable and duct  
specs



GPS  
coordinates



compressor  
specs



lubricant  
used

Info automatically saved by the App in a PDF report and additional info can be set by the operator

Report can be sent by email



App developed for Android devices



Via degli Olmetti, 18 - 00060 Formello (RM) - Rome, ITALY  
Ph. (+39) 06.90.40.50.39 E-mail: [info@fibernet.it](mailto:info@fibernet.it)