

# LADY

Cable Jetting Machine



# Jetting machine for FTTH application

Cables from ø 1.2 mm up to ø 10 mm and ducts from ø 5 mm up to ø 16 mm



### LADY JETTING MACHINE

### TECHNICAL DATA

Max blowing speed	>80 m/min	Dimensions	235 x 180 x 130 mm
Cable diameters	ø 1.2 to 10 mm	Dimensions (with case)	475 x 415 x 245 mm
Duct diameters	ø 5 to 16 mm	Weight	6 Kg
Max air pressure	16 bar	Weight (with accessorized case)	13,8 Kg
Pushing force	up to 150 N	USB port	Yes
Case	Rugged waterproof case	Max tested jetting distance <sup>1</sup>	1000 m

1. Testing conducted by FIBERNET using real circuits. Distance will vary based on conditions: circuit, curves number, duct type and use.



#### **ACCESSORIES INCLUDED**

*	Duct adapter set (customers' choice 1 pc among)	ø 5 - 7 - 8 - 10 - 12 - 14 - 16 mm
**	Cable adapter set (customers' choice 1 pc among)	ø 1÷2 - 2÷3 - 3÷4 - 4÷5 - 5÷6 - 6÷9 - 9÷10 mm
	Hex wrenches	ø 2-3-8 mm
	Micro duct cutter	duct range ø 0 - 25 mm (1 pc)
	Air hose with valve	5 m with quick coupling connector (1 pc)
	Lubricant	1 L bottle (1 pc)

- \* DUCT ADAPTER SET includes: Specific duct gaskets (10 pcs)
- \*\* CABLE ADAPTER SET includes: Specific cable gaskets set (5 pcs per measure) and cable entry guide

  Example: duct adapter ø 7 mm duct gasket ø 7 mm cable adapter ø 3÷4 mm cable gasket ø 3 3,5 4 mm (5 per measure) cable entry guide ø 3÷4 mm



## **ELECTRIC DRIVER & MOTOR**


### TECHNICAL DATA

Rugged waterproof case	410 x 340 x 205 mm
Weight	12 kg
Rated torque	2,8 Nm
Rated power	250 W
Rated current	6,8 A
Battery li-ion	36 V - 15 A
Power supply	36 V - 2,5 A
Pushlock emergency button	Yes
Torque limiter	Yes





- All data shown on display are availabale for download

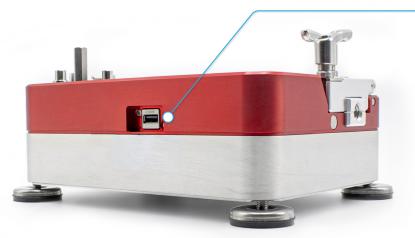

## App for Lady cable jetting machine

Download the cable blowing report on your device





cable laying distance (m)



max pressure (Bar)



graph



cable and duct specs





cable laying time



plant info



GPS coordinates



Info automatically saved by the App in a PDF report and additional info can be set by the operator

Report can be sent by email







App developed for Android devices

