

# U/UTP PATCHCORD CAT. 6A

RJ45 Connector  
AWG 24  
LSZH



# U/UTP PATCHCORD CAT. 6A


Patchcord unshielded U / UTP category 6A. Made to guarantee mechanical and electrical reliability, this patchcord provides to create high-performance connections in data center applications. Electrical compliance over 500 MHz.



## TECHNICAL SPECIFICATIONS

CONDUCTOR	Copper AWG 24 - 7 x $\varnothing$ 0,192 mm
INSULATION	Polyolefin - $\varnothing$ 0.95 $\pm$ 0.05
NUMBER OF COUPLES	4
OUTER SHEATH	PVC LSZH (RAL 9010)
TOTAL DIAMETER	$\varnothing$ 6.0 $\pm$ 0.15
OPERATING TEMPERATURE	-20° C ÷ + 60° C
STORAGE TEMPERATURE	-20° C ÷ + 70° C
TRACTION RESISTANCE	50N
MINIMUM BENDING RADIUS	8 X $\varnothing$ cable
CONNECTOR RJ45	RJ45 - gold plated pins 50 $\mu$ m

## PRODUCT DETAILS

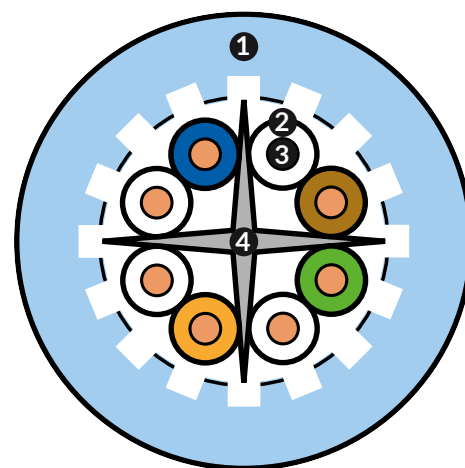

- 1 - Outer sheath of the cable - LSZH
- 2 - Outer sheath of the conductor
- 3 - Conductor
- 4 - Pair separation element