


# FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00  
Date: 08/04/2023 Time: 05:51 PM

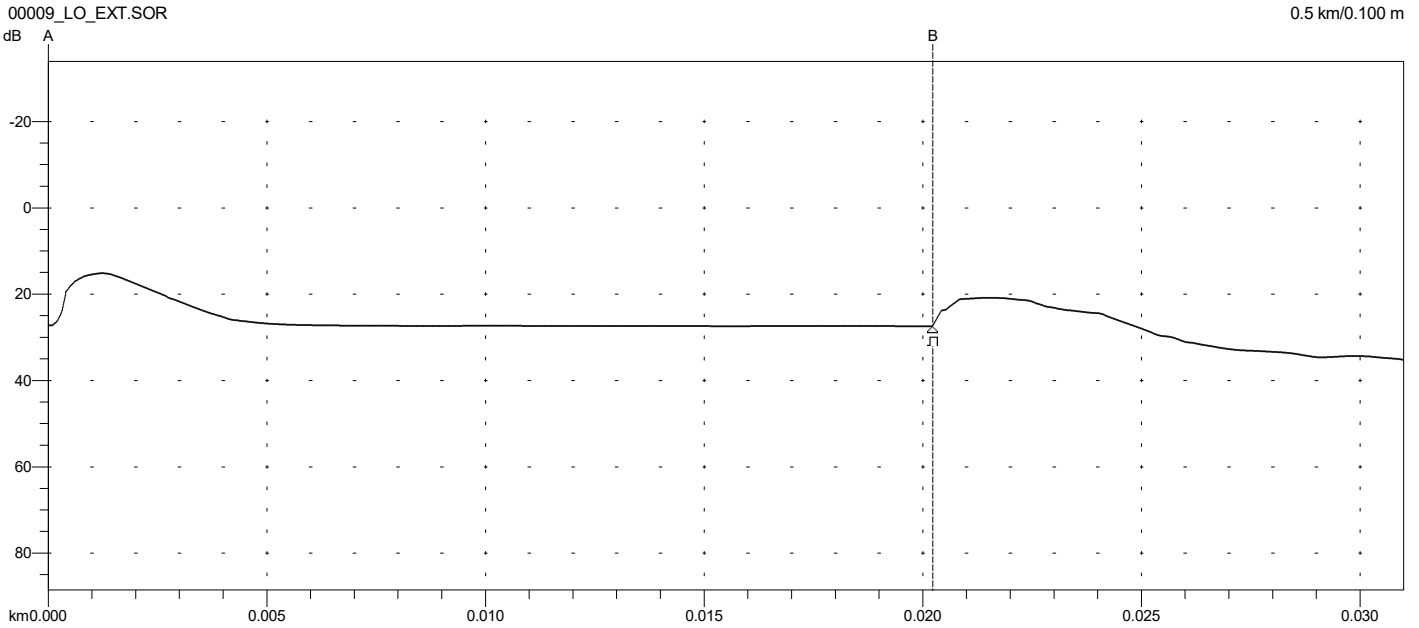

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.197 dB Reflectance: N/A	[H] 10ns / 1.0m Avg: Fast 8192 /1550 nm/SM
---	---	--

Analysis Results -- 00009\_LO\_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.24 11.749	>3.00	-56.12

Overall (End-to-End) Loss: 0.24 dB

```


Primary Trace: 00009_LO_EXT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 11:48 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 10 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 8192
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: EN
Cable ID:
Fiber ID: 13
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

# FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00  
Date: 08/04/2023 Time: 05:51 PM

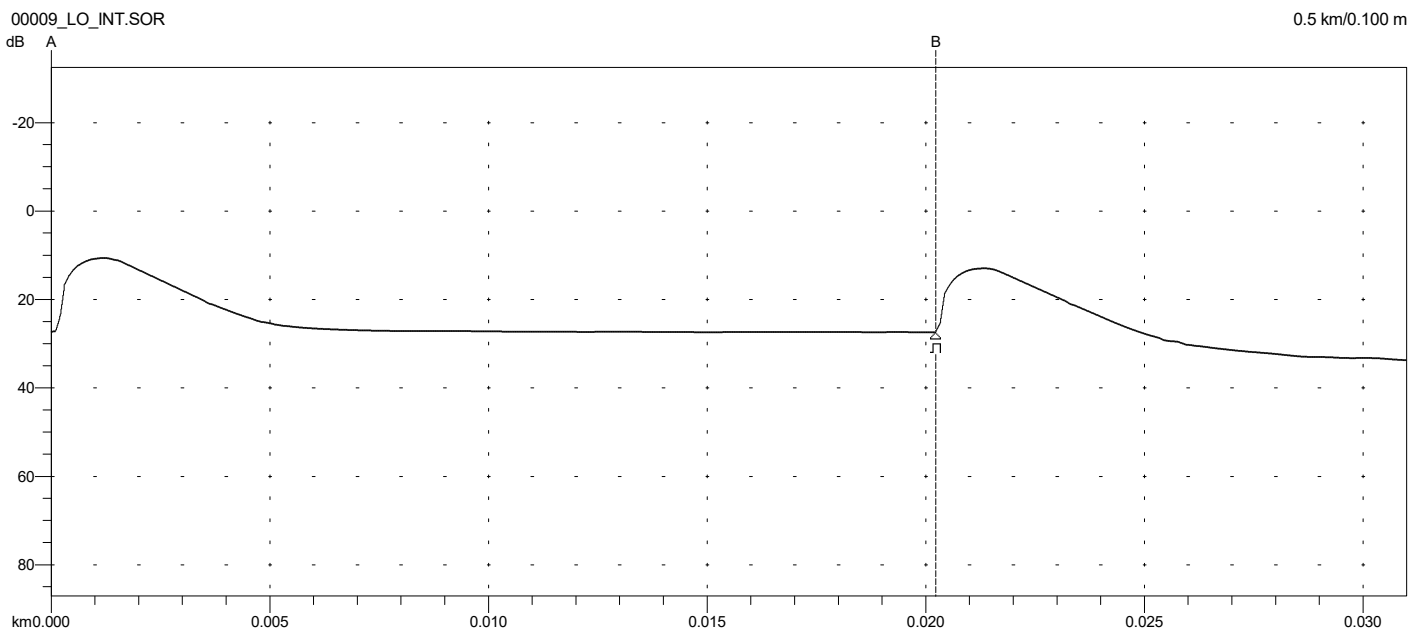

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.080 dB Reflectance: N/A	[H] 10ns / 1.0m Avg: Fast 8192 /1550 nm/SM
---	---	--

Analysis Results -- 00009\_LO\_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.13 6.328	>3.00	-42.71

Overall (End-to-End) Loss: 0.13 dB

```


Primary Trace: 00009_LO_INT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 11:58 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 10 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.05 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 8192
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: EN
Cable ID:
Fiber ID: 14
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272566725
Optics Mod:
S/N:
S/W Rev.: 2.03
Other:

# FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00  
Date: 08/04/2023 Time: 05:55 PM

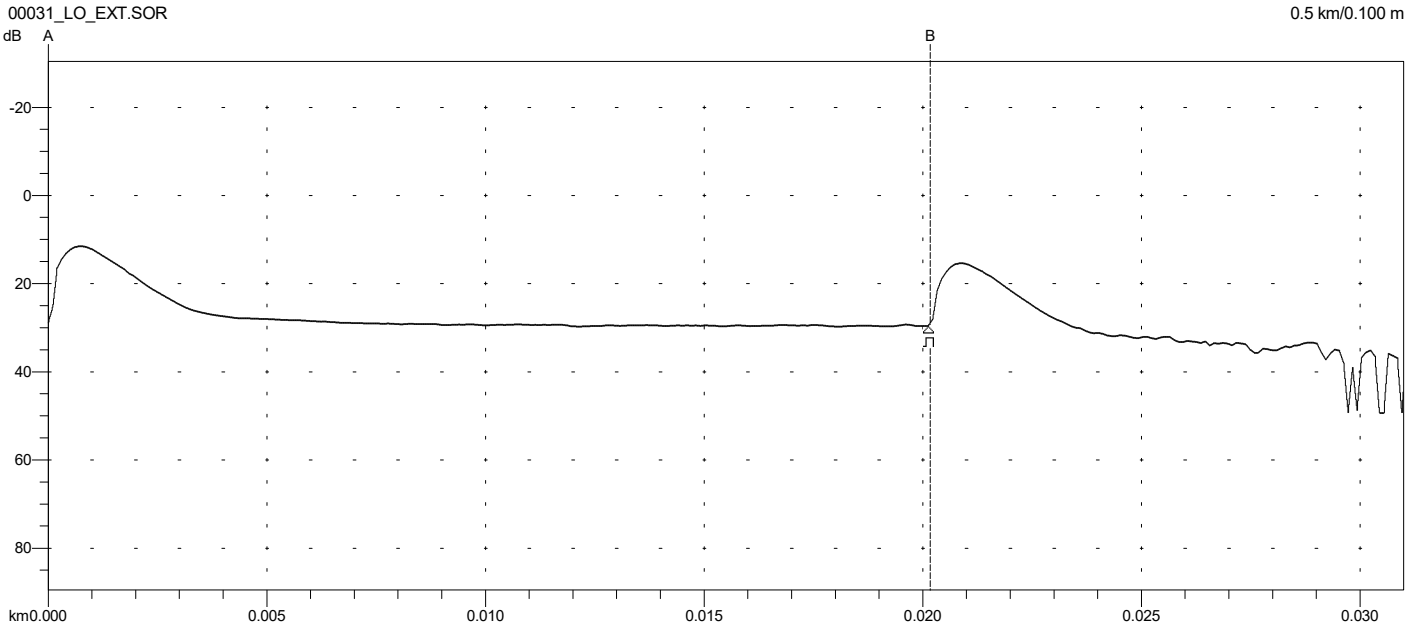

A: 0.0000 km B: 0.0202 km A -> B: 0.0202 km	Index: 1.468200 2-Point Loss: 0.221 dB Reflectance: N/A	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	---	--

Analysis Results -- 00031\_LO\_EXT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0201	0.89 44.038	>3.00	>-48.27

Overall (End-to-End) Loss: 0.89 dB

```

Primary Trace: 00031_LO_EXT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 02:36 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----


Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other:

# FIBERNET

Anritsu NetWorks/OTDR - Version 5.0.00  
Date: 08/04/2023 Time: 05:56 PM

00031\_LO\_INT.SOR  
dB

0.5 km/0.100 m

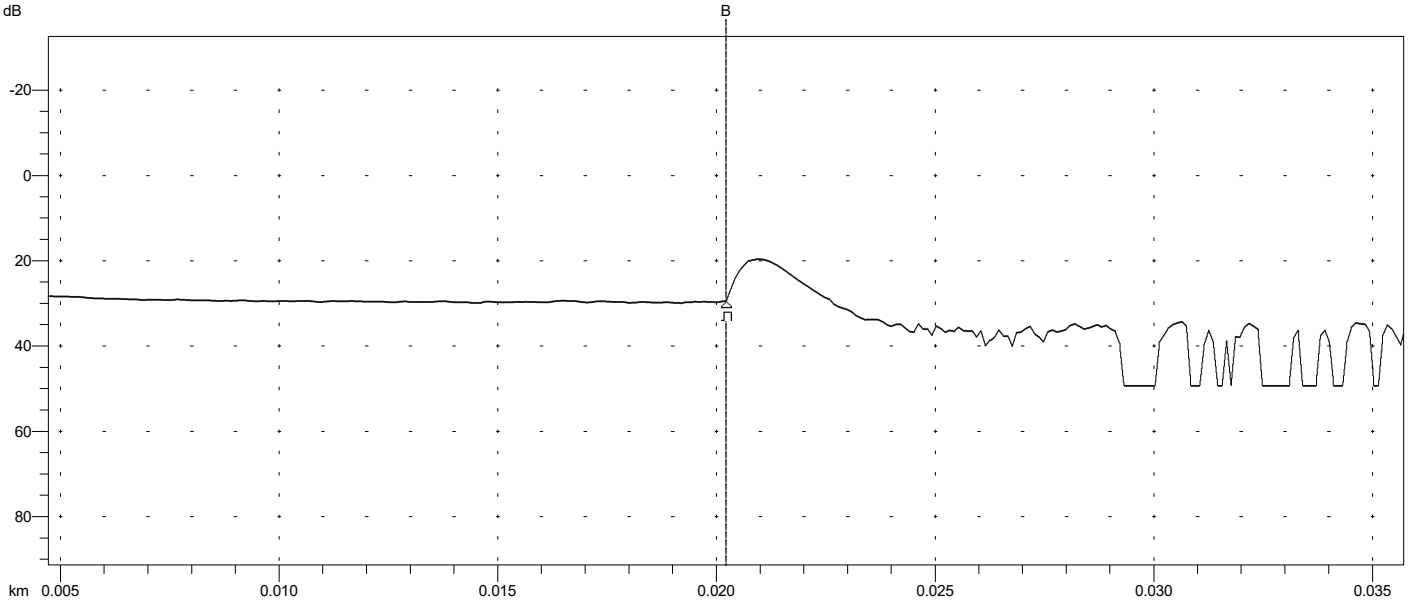

A: 0.0202 km B: 0.0202 km A -> B: 0.0000 km	Index: 1.468200 2-Point Loss: 0.000 dB Reflectance: >-56.72 dB	[H] 3ns / 0.3m Avg: Fast 13312 /1550 nm/SM
---	--	--

Analysis Results -- 00031\_LO\_INT.SOR

Feature #/Type	Location (km)	Event-Event (dB) (dB/Km)	Loss (dB)	Refl (dB)
1/E	0.0202	0.92 45.546	>3.00	>-56.80

Overall (End-to-End) Loss: 0.92 dB

```

Primary Trace: 00031_LO_INT.SOR
Date: 08/04/23 Range: 0.5 km
Time: 02:34 PM Resolution: 0.100 m
Product Type: MT9085B-05 Pulse Width: 3 ns
Opt. Module: Index: 1.468200
Fiber Type: Singlemode WaveLength: 1550 nm
FAS Thresholds: Horz. Shift: 0.0000 km
Loss: 0.06 dB Vert. Shift: 0.00 dB
Reflectance: -60.00 dB No. Averages: 13312
Fiber Break: 3.00 dB
Backscatter: -81.50 Trace Type: Anr SR4731
Trace Flags: Analysis
ORL: N/A
    
```

----- Page 1 -----

Language: IT
Cable ID:
Fiber ID: 1
Wavelength: 1550
Org. Loc:
Term. Loc:
Cable Code:
Condition: OT
Operator:
Comment:
Supplier: Anritsu
OTDR Model: MT9085B-055
S/N: 6272458690
Optics Mod:
S/N:
S/W Rev.: 2.00
Other: